

# ROWHEELS® **REV** Order Form

PROVIDER INFORMATION		RTS INFORMATION	
Provider:		Name:	
Provider POC:		Email:	
Account #:		Phone #:	
Email:		Address:	
Phone #:		City:	State: ZIP:
Fax #:		<b>SHIP TO INFORMATION</b>	
Address:		Company (if applicable):	
City:	State: ZIP:	Name:	
Client:		Phone #:	
<b>Rowheels information</b>		Address:	
Ship date:		City:	State: ZIP:
Order #:		Ship via:	
<b>User Information</b>		<b>Wheelchair Information</b>	
Weight:	Height:	Wheelchair Make:	Model:
Med. Diagnosis:		Camber Angle:	Other:

**Rowheels are covered through HCPSC billing code E2227**

**Please email or fax to Rowheels customer service at [orders@rowheels.com](mailto:orders@rowheels.com) or (608) 721-3510**



## Key 1: MODEL

MODEL	KEY CODE	KEY INPUT	
REV-LX (Low gear).....	RWLX		\$5,400 (E2227)
REV-HX(High gear).....	RWHX		\$5,400 (E2227)



The Right Way to Roll.™

[www.rowheels.com](http://www.rowheels.com)

2895 Commerce Park Drive

Fitchburg, WI 53719

PHONE: (608) 268-9670 | FAX: (608) 719-0010 | [support@rowheels.com](mailto:support@rowheels.com)

# ROWHEELS® **REV** Order Form

## Key 2: COLOR SCHEME

COLOR SCHEME	KEY CODE	KEY INPUT
Red/Black.....	0.....	STD
Black/Black.....	1.....	STD
White/Black.....	2.....	STD



Red/Black



Black/Black



White/Black

## Key 3: TORQUE ARM

TORQUE ARM	KEY CODE	KEY INPUT
8" Torque Arm.....	8.....	STD
10" Torque Arm.....	10.....	STD

## Key 4: HANDRIM

HANDRIM	KEY CODE	KEY INPUT
Out-Front Natural-Fit.....	N.....	\$335
Out-Front Natural-Fit LT.....	NL.....	\$365
Out-Front SURGE.....	S.....	\$375
Out-Front SURGE LT.....	SL.....	\$405
O-Grip.....	O.....	\$315 (not available on 22" wheels)
Projection-8 (45°).....	P.....	\$345
Standard.....	R.....	STD



The Natural-Fit has an oval profile that increases gripping surface area by 80%. The optional thumb grip component **is not** available for use on Rowheels.

The Surge has the same oval profile along with a rubber strip along the top surface of the oval for increased friction while leaving the side surface smooth for braking.

O-Grips are ideal for anyone with limited hand function or anyone that prefers the feel & functionality of a fully-coated handrim. Research shows the O-Grip to be 59.1% more grippy than a standard vinyl

Projection handrims are great for people with good arm/shoulder strength but poor hand/finger grip. The standard option is 8 projections at 45°.



The Right Way to Roll.™

[www.rowheels.com](http://www.rowheels.com)

2895 Commerce Park Drive

Fitchburg, WI 53719

PHONE: (608) 268-9670 | FAX: (608) 719-0010 | [support@rowheels.com](mailto:support@rowheels.com)

# ROWHEELS® **REV** Order Form

## Key 5: AXLE LENGTH

AXLE LENGTH	KEY CODE	KEY INPUT
Length 0 (2.0").....	0.....	STD
Length 1 (2.1").....	1.....	STD
Length 2 (2.2").....	2.....	STD
Length 3 (2.3").....	3.....	STD
Length 4 (2.4").....	4.....	STD
Length 5 (2.5").....	5.....	STD

\*See page 5 for tools & instructions on measuring axle lengths or click on link to watch video.

[Instructional Video](#)

## Key 6: TIRE

TIRES	KEY CODE	KEY INPUT
No tire.....	N.....	NA
Schwalbe RightRun (Black/Grey).....	R.....	STD
Schwalbe Marathon Plus (Black).....	M.....	\$130
Shox Solid (Black).....	S.....	\$59
Kenda Nevegal.....	X.....	\$78 (not available on 22" & 26" wheels)



The Schwalbe RightRun tires incorporate their most effective Smart-Guard puncture protection layer, hand-friendly 2Grip side walls, and attractive two color compound. Robust Black'n Roll tread center compound that is non-marking



The Schwalbe The Marathon Plus is the benchmark for puncture-proof pneumatic tires on the wheelchair. The all-new version comes with improved rolling resistance along with hand-friendly 2Grip side walls, and the robust Black'n Roll tread center compound.



SHOX Solid Wheelchair Tires are airless so you don't have to worry about punctures and are a firm 110psi equivalent.



The Kenda Nevegal is the optimal tire for an assortment of ever-changing terrain. It is highly adaptable and excels under various conditions, from loose rock, tall grass, muddy roots, single track and high speed descents, and many more.

## Key 7: WHEEL SIZE

WHEEL SIZE	KEY CODE	KEY INPUT
22" (489mm).....	2.....	STD
24" (540mm).....	4.....	STD
25" (559mm).....	5.....	STD
26" (590mm).....	6.....	STD



The Right Way to Roll.™

[www.rowheels.com](http://www.rowheels.com)

2895 Commerce Park Drive

Fitchburg, WI 53719


PHONE: (608) 268-9670 | FAX: (608) 719-0010 | [support@rowheels.com](mailto:support@rowheels.com)

# ROWHEELS® **REV** Order Form

## KEY 8: SPOKE GUARD

SPOKE GUARD	KEY CODE	KEY INPUT
Carbon Fiber*.....	S (STD)	
Clear.....	C (STD)	

\*Guard is covered in a vinyl carbon fiber wrap, Not actual carbon

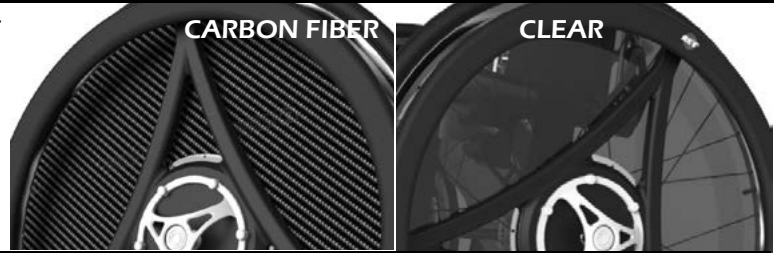

## FINAL ORDER KEY CODE

Enter, in order, the seven option keys selected on the previous page here:

**KEY#1 KEY#2 KEY#3 KEY#4 KEY#5 KEY#6 KEY#7 KEY#8**

Sample Final Order Key code - **RWLX-0-8-N-1-R-4-S**

Description - REV 1, Red/Black, 8" Torque Arm, Natural-Fit, Length 2.1", Right Run Tire, 24", CF Spoke Grd


## REV<sup>1</sup> WHEELCHAIR ADAPTER INFO

In order for the REV<sup>1</sup> to function properly, our universal frame clamp latches must be installed on the wheelchair's frame. If the chair to be used has a tubular frame with a diameter between **0.75" (19.05mm) and 1.375" (34.93mm)\*** or is a **Quickie Q7**, select "Compatible Frame", otherwise select "Not Compatible" and provide us with the wheelchair make, model and frame dimensions in the "Notes" section below. A decision regarding whether a custom adapter can be designed will be made. An RFQ can then be submitted for the cost of the custom adapter.

### Compatible Frame

### Not Compatible

\*Use measuring tape or our measurement cut-out on pg.5 to assess chair compatibility

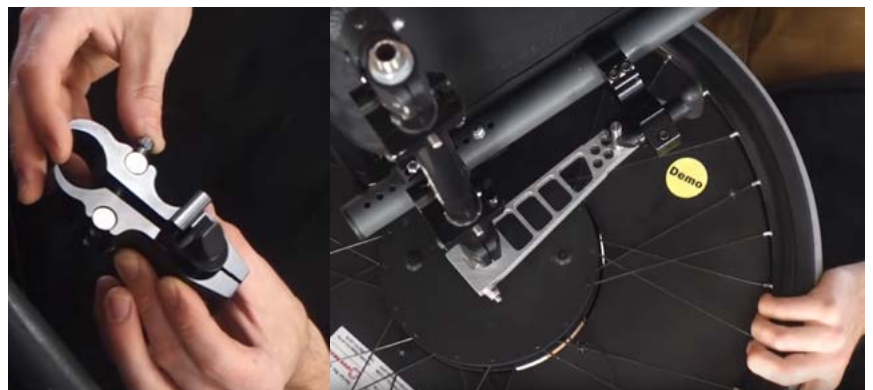

NOTES:



The Right Way to Roll.™

[www.rowheels.com](http://www.rowheels.com)

2895 Commerce Park Drive


Fitchburg, WI 53719

PHONE: (608) 268-9670 | FAX: (608) 719-0010 | [support@rowheels.com](mailto:support@rowheels.com)

# ROWHEELS® **REV** Order Form

## FRAME ADAPTER MEASUREMENT CUT-OUT

This side of the scale is used to measure the length of your existing axle length. Measure the axle while inserted in the hub from the hub to the inside of the ball bearing retainers.

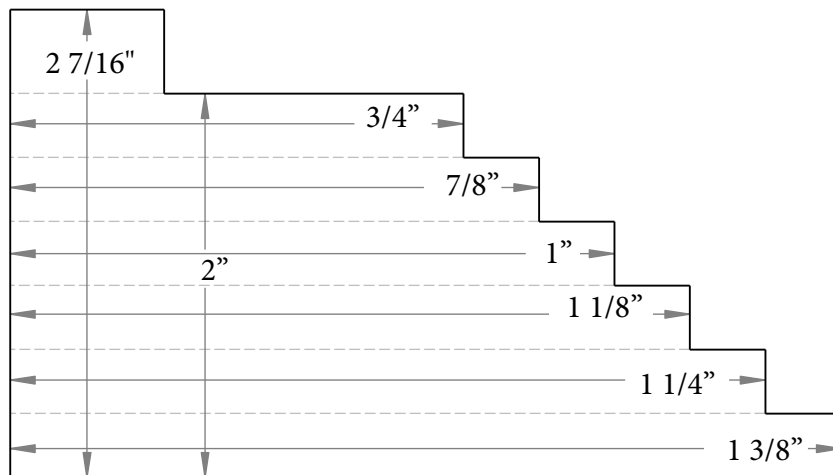

This side of the scale is used to measure the the diameter of your chair's frame. Cut out and wrap the scale around the frame in a place that is free of obstructions or bends.

Please Note: While Rowheels has made every effort to accommodate a wide variety of wheelchair makes and models, it is possible that accessories such as T-style arms, side guards, wheel locks and positioning devices may interfere with in the installation of the REV<sup>1</sup> wheelset. In such a case, please contact Rowheels at [support@rowheels.com](mailto:support@rowheels.com) or call 608-268-9670 to speak with a customer service representative.



The Right Way to Roll.™

[www.rowheels.com](http://www.rowheels.com)

2895 Commerce Park Drive

Fitchburg, WI 53719

PHONE: (608) 268-9670 | FAX: (608) 719-0010 | [support@rowheels.com](mailto:support@rowheels.com)