



PROVIDER / CUSTOMER INFORMATION:				
Provider Information:	End User Information:			
Date:	Name:		Height:	
IVC Acct #:	Ship to Address:		Weight (lbs.):	
Contact:	Address Line 2:		Leg Length (in.):	
Phone #:	City:		Hip Width (in.):	
Fax/Email:	State: Zip:		Phone #:	
○ Ship to Provider	Ship to End User		Email:	


ORDER REQUEST TYPE:		
○ Order	PO#	

BASE MODEL: (see definitions)		
10020	Eliminator OSR - U Cage Frame Note: Chair ordered without front wheel, rear wheels, front tire, rear tires, pushrims or axles starts at \$4,315	\$4,605

Assembly: (see definitions)			
0	10046	Unassembled	\$0
0	10047	Assembled	\$301

FORK TYPE:		
O 65218	Aluminum Fork	\$0
<u> </u>	Carbon Fiber Fork	\$361

FRAME OPTIONS: (see definitions and diagram below)			
SEAT TYPE:			
	Standard Seat Upholstery, Omit Solid		
75013	Seat	\$0	
	Aluminum Solid Seat	\$90	
75092	Carbon Solid Seat	\$301	
CAMBER TUE	CAMBER TUBES:		
75018	Standard Full Camber Tube	\$0	
75015	2" Cut - Out Camber Tube	\$301	
75016	3" Cut - Out Camber Tube	\$301	
75017	4" Cut - Out Camber Tube	\$301	







KNEE WIDTH: (see definitions and diagram)		
O 15315	7.0" Knee Width	\$0
O 15316	7.5" Knee Width	\$0
15317	8.0" Knee Width	\$0
O 15318	8.5" Knee Width	\$0
15319	9.0" Knee Width	\$0
15320	9.5" Knee Width	\$0
O 15321	10.0" Knee Width	\$0
15322	10.5" Knee Width	\$0
15323	11.0" Knee Width	\$0
C 15388	Custom Knee Width (See Specials Request Box)	\$54





FRAME WID	FRAME WIDTH: (see definitions and diagrams to the right)		
UPPER FRAM			
O 15195	10.0" Upper Frame Width	\$0	
O 15196	10.5" Upper Frame Width	\$0	
<u> </u>	11.0" Upper Frame Width	\$0	
<u> </u>	11.5" Upper Frame Width	\$0	
<u> </u>	12.0" Upper Frame Width	\$0	
<u> </u>	12.5" Upper Frame Width	\$0	
<u> 15201</u>	13.0" Upper Frame Width	\$0	
<u> 15202</u>	13.5" Upper Frame Width	\$0	
<u> 15203</u>	14.0" Upper Frame Width	\$0	
<u> </u>	14.5" Upper Frame Width	\$0	
<u> </u>	15.0" Upper Frame Width	\$0	
<u> </u>	15.5" Upper Frame Width	\$0	
<u> </u>	16.0" Upper Frame Width	\$0	
<u> </u>	16.5" Upper Frame Width	\$0	
<u> </u>	17.0" Upper Frame Width	\$0	
<u> </u>	Custom Upper Frame Width (See Specials Request Box)	\$54	
LOWER FRAM	ME WIDTH:	•	
O 15217	11.0" Lower Frame Width	\$0	
O 15218	11.5" Lower Frame Width	\$0	
<u> 15219</u>	12.0" Lower Frame Width	\$0	
<u> </u>	12.5" Lower Frame Width	\$0	
O 15221	13.0" Lower Frame Width	\$0	
15222	13.5" Lower Frame Width	\$0	
15223	14.0" Lower Frame Width	\$0	
<u> </u>	14.5" Lower Frame Width	\$0	
15225	15.0" Lower Frame Width	\$0	
<u> </u>	15.5" Lower Frame Width	\$0	
<u> </u>	16.0" Lower Frame Width	\$0	
<u></u>	16.5" Lower Frame Width	\$0	
<u> </u>	17.0" Lower Frame Width	\$0	
<u> </u>	17.5" Lower Frame Width	\$0	
<u> 15231</u>	18.0" Lower Frame Width	\$0	
<u> </u>	Custom Lower Frame Width (See Specials Request Box)	\$54	










AXLE POSITION: (see diagram below)		
<u> </u>	5.0" Axle Position	\$0
15237	5.5" Axle Position	\$0
15238	6.0" Axle Position	\$0
15239	6.5" Axle Position	\$0
<u> </u>	7.0" Axle Position	\$0
O 15241	7.5" Axle Position	\$0
<u> 15242</u>	8.0" Axle Position	\$0
<u> </u>	Custom Axle Position (See Specials Request Box)	\$54

KNEE DEPTH: (see definitions and diagram below)		
<u> </u>	16.0" Knee Depth	\$0
O 15273	16.5" Knee Depth	\$0
O 15374	17.0" Knee Depth	\$0
O 15274	17.5" Knee Depth	\$0
O 15275	18.0" Knee Depth	\$0
O 15276	18.5" Knee Depth	\$0
15375	19.0" Knee Depth	\$0
O 15278	19.5" Knee Depth	\$0
O 15376	20.0" Knee Depth	\$0
<u> </u>	Custom Knee Depth (See Specials Request Box)	\$54


SIZING: (see	SIZING: (see definitions and diagram below)		
REAR SEAT H	EIGHT:		
<u> </u>	15.0" Rear Seat Height	\$0	
O 15281	15.5" Rear Seat Height	\$0	
15282	16.0" Rear Seat Height	\$0	
O 15283	16.5" Rear Seat Height	\$0	
O 15284	17.0" Rear Seat Height	\$0	
O 15285	17.5" Rear Seat Height	\$0	
O 15286	18.0" Rear Seat Height	\$0	
15287	18.5" Rear Seat Height	\$0	
O 15288	19.0" Rear Seat Height	\$0	
O 15289	19.5" Rear Seat Height	\$0	
<u> </u>	20.0" Rear Seat Height	\$0	
O 15379	Custom Rear Seat Height (See Specials Request Box)	\$54	
OVERALL LENGTH:			
•		l ćo	
15245	64" Overall Length	\$0	
15247	66" Overall Length	\$0	
<u> </u>	68" Overall Length	\$0	
15251	70" Overall Length	\$0	
15253	72" Overall Length	\$0	
15255	74" Overall Length (Cannot get compact shipping)	\$0	
15257	76" Overall Length (Cannot get compact shipping)	\$0	
<u> </u>	Custom Overall Length (See Specials Request Box)	\$54	

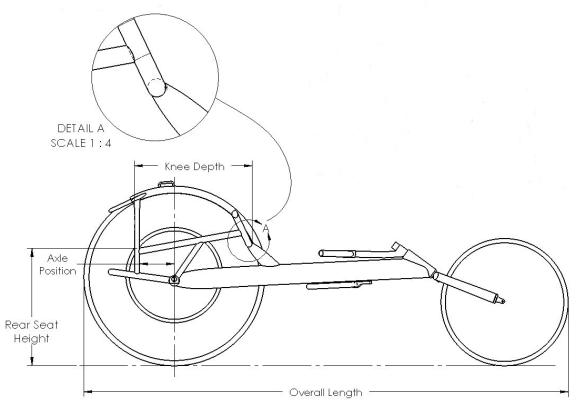





KNEE HEIGHT: (see diagram below)		
<u> </u>	16.0" Knee Height	\$0
<u> </u>	16.5" Knee Height	\$0
15306	17.0" Knee Height	\$0
O 15311	17.5" Knee Height	\$0
<u> </u>	18.0" Knee Height	\$0
O 15312	18.5" Knee Height	\$0
<u> </u>	19.0" Knee Height	\$0
15313	19.5" Knee Height	\$0
O 15309	20.0" Knee Height	\$0
<u> </u>	Custom Knee Height (See Specials Request Box)	\$54



STEERING: (see diagrams below)		
STEERING HANDLE TYPE:		
<u>65120</u>	Horizontal Steering Handle	\$0
<u>65121</u>	○ 65121 Vertical Steering Handle \$0	
TRACK CONTROL:		
O 65115	Triangle Track Control	\$0
O 65116	Oval Track Control	\$0
TRACK CONTROL MOUNT:		
O 65110	Top Mount Track Control	\$0
<u>65111</u>	Bottom Mount Track Control	\$0



TRACK	CONTROL:
Triangle	Oval

CAMBER ANGLE: (see definitions and diagram to the left)			
45005	11 Degree Camber	\$0	
45006	12 Degree Camber	\$0	
45007	13 Degree Camber	\$0	
45008	15 Degree Camber	\$0	

WHEEL SETS: (see definitions and diagram to the left)			
FRONT WHEEL TYPE:			
O 50150	Omit Front Wheel Build for 20"	-\$30 (credit)	
<u> </u>	20" Metal Spoked	\$0	
<u> </u>	20" Corima Carbon Fiber	\$722	
REAR WHEEL	. TYPE:		
<u> </u>	Omit Rear Wheels & Axles, Build for 700C	-\$100 (credit)	
C 50152	Omit Rear Wheels & Axles, Build for 26"	-\$100 (credit)	
<u> </u>	High Performance, 700C (Clincher)	\$0	
O 50139	High Performance, 26" (Clincher)	\$120	
O 50147	Corima Carbon Fiber Disc, 700C (Tubular)	\$3,004	
C 50148	Corima Carbon Fiber 4 Spoke, 700C (Tubular)	\$3,004	
FRONT TIRE	TYPE:		
<u> </u>	Omit Front Tire	-\$20 (credit)	
C 50464	20" Vittoria	\$0	
<u> </u>	20" Panaracer	60	
REAR TIRE TYPE:			
<u> </u>	Omit Rear Tires	-\$20 (credit)	
O 50236	26" Panaracer (Clincher - 23mm)	\$0	
O 50460	700C, Black (Clincher - 19mm)	\$0	
O 50241	700C Continental Sprinter (Tubular - 22mm)		
O 50461	700C Panaracer Rapide (Tubular - 20mm)	\$90	
O 50462	700C Continental Podium (Tubular - 22mm)	\$139	

PUSHRIMS: (Size Selection Required - see diagram)				
RUBBER COA	RUBBER COATED PUSHRIM SIZE: (Diameter)			
<u> </u>	Omit Pushrims	-\$120 (credit)		
C 50330	12.0" Diameter Pushrims	\$0		
O 50331	12.5" Diameter Pushrims	\$0		
O 50332	13.0" Diameter Pushrims	\$0		
O 50333	13.5" Diameter Pushrims	\$0		
O 50334	14.0" Diameter Pushrims	\$0		
<u> </u>	14.5" Diameter Pushrims	\$0		
O 50336	15.0" Diameter Pushrims	\$0		
<u> </u>	15.5" Diameter Pushrims	\$0		
<u> </u>	16.0" Diameter Pushrims	\$0		
<u> </u>	16.5" Diameter Pushrims	\$0		
C 50340	Custom Pushrim Size (See Specials Request Box)	\$54		





UPHOLSTERY:		
MATERIAL & COLOR:		
30001	Nylon, Black Upholstery	\$0
BACK UPHOLSTERY STYLE:		
30028	Adjustable Tension Back Upholstery	\$0
SEAT UPHOLSTERY:		
30016	6" Seat Upholstery Length	\$0
30017	9" Amputee Seat Upholstery Length	\$0
SEAT CUSHIONS:		
30018	Soft Seat Cushion	\$47
ACCESSORIES:		

0 30010	Soft Seat easilion	777	
ACCESSODII	EC.		
ACCESSORI	ACCESSORIES:		
SAFETY:			
C 25015	Safety Light, Front (White)	\$18	
C 25016	Safety Light, Rear (Red)	\$18	
<u></u>	Safety Flag and Mount	\$60	
POSITIONING:			
25001	Click Strap, 8" Small	\$90	
25002	Click Strap, 10" Medium	\$97	
25003	Click Strap, 12" Large	\$109	
PERFORMANCE ENHANCEMENT:			
<u></u>	Cordless Computer	\$120	
TRAINING:			
Indoor training roller available but sold and shipped separately.			
25076	Garmin Computer/Heart Rate Monitor	\$602	

of www.topendwheelchair.com				
COLOR OPTIONS:				
FRAME COLOR:				
0	55018	Black	Wet Black	\$0
$\tilde{\circ}$	55019	Black	Black Prism	\$0
\overline{C}	55017	Black	Stealth Black	\$0
\overline{C}	55010	Blue	Midnight Blue	\$0
\overline{C}	55011	Blue	Royal Blue	\$0
$\tilde{\circ}$	55012	Blue	Electric Blueberry	\$0
Õ	55023	Grey	Stealth Grey	\$0
Õ	55053	Green	Agriculture Green	\$0
Ö	55008	Green	Grasshopper Green	\$0
O	55054	Green	Neon Green	\$0
	55006	Orange	Sunkissed Orange	\$0
	55005	Orange	Simple Orange	\$0
0	55051	Orange	Neon Orange	\$0
0	55015	Pink	Bubblegum Pink	\$0
0	55057	Pink	Neon Pink	\$0
0	55055	Purple	Lilac Purple	\$0
0	55001	Red	Simple Red	\$0
0	55002	Red	Tangerine Red	\$0
0	55003	Red	Raspberry Red	\$0
\circ	55050	Red	Neon Red	\$0
0	55020	Silver	Silver Metallic	\$0
0	55016	White	White Snow	\$0
0	55007	Yellow	Safety Yellow	\$0
\circ	55052	Yellow	Neon Yellow	\$0
0	55066	Raw	Buffed Aluminum	\$421
	K COLOR	:		
\circ	55068	Black	Flat Black	\$0
0	55041	Black	Wet Black	\$120
0	55042	Black	Black Prism	\$120
0	55040	Black	Stealth Black	\$120
0	55033	Blue	Midnight Blue	\$120
0	55034	Blue	Royal Blue	\$120
0	55035	Blue	Electric Blueberry	\$120
0	55046	Grey	Stealth Grey	\$120
0	55061	Green	Agriculture Green	\$120
	55031	Green	Grasshopper Green	\$120
	55062	Green	Neon Green	\$120
0	55029	Orange	Sunkissed Orange	\$120
	55028	Orange	Simple Orange	\$120
$\overline{}$	55059	Orange	Neon Orange	\$120
	55038	Pink	Bubblegum Pink	\$120
$\frac{1}{2}$	55065	Pink	Neon Pink	\$120
0	55063	Purple	Lilac Purple	\$120
0	55024	Red	Simple Red	\$120
\overline{C}	55025	Red	Tangerine Red	\$120
	55026	Red	Raspberry Red	\$120
\overline{C}	55058	Red	Neon Red	\$120
	55043	Silver	Silver Metallic	\$120 \$120
0	55039 55030	White Yellow	White Snow Safety Yellow	\$120
	55060	Yellow	Neon Yellow	\$120
\overline{C}	55077	N/A	Carbon Fiber Fork Chosen	\$0





Custom frames may have stylistic variations. Dimensional properties and tolerances committed to by Top End are defined in the Measurement Definitions Documents, which can be found on the resource center of www.topendwheelchair.com

DEFINITIONS:		
Assembled vs Unassembled:	If TE10046 (Unassembled) is selected the chair will require about 60 minutes of assembly upon delivery (instructions provided). If TE10047 (Assembled) is selected the chair will be fully assembled upon delivery. Shipping rate is \$150 for all shipments in the continental US. Freight quotes for shipments outside the continental US are available upon request.	
Open V Cage:	Recommended for beginner level athletes with T-10 SCI and above as that level of injury requires more of a bucket type seat. Designed for people who prefer the seated position and/or may also want to kneel. This cage does require good transfer skills.	
U Cage:	Recommended for experienced customers who exclusively use the kneeling position. Customers tend to have good balance and are T-10 injury level or below. U cage includes an aluminum knee plate for extra rigidity.	
I Cage:	I Cage is the easiest transfer style to use but cannot be converted to a kneeling position. This style is typically used by higher level injury athletes who sit in the traditional feet forward position with an adjustable fixed style footrest.	
Aluminum Solid Seat:	Provides a solid surface. Not recommended if customers intend to adjust the seat upholstery.	
Carbon Fiber Solid Seat:	Provides a solid Carbon fiber surface. Not recommended if customers intend to adjust the seat upholstery.	
Cut Out Camber Tube:	The distance from the front of the cut Camber Tube to the back of the support tube. Recommended when a customer who desires a kneeling position requires additional space for their lower legs. This additional space is accomplished by removing the center portion of the camber tube after welding. Creates more room for legs with low seat heights.	
Camber Angle:	Angle of the wheels. Measured from vertical to the angle of the rear tire on one side.	
Upper Frame Width:	Measured directly above the center of the Camber Tube, between the insides of the Fenders. Maximum width is 17".	
Lower Frame Width:	Measured at the top of the Seat Rail and from the outside of the Uprights. Maximum width is 18".	
Rear Seat Height:	Measured from the top of the Seat Rail to the ground.	
Overall Length:	Measured from the further most outsides of the front & rear tires.	
Axle Position:	Measured from the center of the Camber Tube to the front of the rear Upright. (This needs to be parallel to the ground.)	
Knee Height:	Measured from the top of the U-Cage Horizontal Cross Member to the ground.	
Knee Depth:	Measured from the back of the Rear Upright to the front of the U-Cage Cross member. (This needs to be parallel to the ground.)	
Knee Width:	Measured between the inside of the U-Cage vertical tubing.	
Wheel Size:	Eliminator OSR Racing wheelchairs use 700c and 26" size wheels with threaded axles. A standard threaded axle 700c metal spoke wheel with inflated black primo tire measures 26-1/2" +/- 1/8" from outside to outside of the tire. A standard threaded axle 26" metal spoke wheel with inflated Panaracer tire measures 24-1/2" +/- 1/8" from outside to outside of the tire.	
Pushrim Size:	Measurement from outside to outside of the metal tubing of the pushrim.	

PRODUCT SPECIFICATIONS:		
Weight Capacity:	250 pounds, 113 Kilograms	
Approximate Chair Weight:	21 pounds, 9.5 Kilograms	
Approximate Box Weight:	37 pounds, 17 Kilograms	
Box Dimensions:	77" X 27" X 23"	

NOTES:		
Tubular Tires:	A tubular tire (or sew-up) is a bicycle tire that is stitched closed around the inner tube to form a torus. The combination is then glued onto the wheel.	
Clincher Tires:	A clincher tire uses a separate airtight inner tube enclosed by the rim which supports the tire carcass and maintains the bead lock. An advantage of this system is that the inner tube can be easily accessed in the case of a leak to be patched or replaced.	
Front Tire:	Vittoria tire has a thicker tread pattern and is great for training and racing.	
Rear Tire Options:	- 700c Continental Sprinter tires are great for racing and training - 700c Continental Podium are thinner lighter, better for racing	
Fenders:	Fenders are made to accommodate a tire that is up to 25mm.	
Omit Wheels:	When omit wheels is selected, product will not come with wheels, tires, tubes, pushrims or axles.	

Warranty Info:

Invacare warrants the frames and fork when purchased new and unused to be free from defects in materials and workmanship for a period of two (2) years from the date of purchase from Invacare or a dealer, with a copy of the seller's invoice required for coverage under this warranty. Invacare warrants the upholstered materials (seat and back) and remaining components of this product when purchased new and unused to be free from defects in materials and workmanship for a period of thirteen (13) months from date of purchase from Invacare or a dealer, with a copy of the seller's invoice required for coverage under this warranty

Page 6 of 6

Note: All special requests are subject to approval, additional charges, and additional lead time Special Request 1) Special Request 2) Special Request 3)

Invacare Corporation Top End Division

Special Request 4) Special Request 5)