



PROVIDER / CUSTOMER INFORMATION:					
Provider Information:		End User Information:			
Date:	Name:		Height:		
IVC Acct #:	Ship to Address:		Weight (lbs.):		
Contact:	Address Line 2:		Leg Length (in.):		
Phone #:	City:		Hip Width (in.):		
Fax/Email:	State:	Zip:	Phone #:		
○ Ship to Provider	○ Ship to End Use	er	Email:		
ORDER REQUEST TYPE:					
○ Quote ○ Quote	and CAD Orde	er PO#			


BASE MODEL - FRAME: (see definitions)		
10034	Eliminator NRG Racing Wheelchair U-Cage Note: Chair ordered without front wheel, rear	\$9,643
	wheels, front tire, rear tires, pushrims or axles starts at \$9,353	

Assembly: (see definitions)			
0	10046	Unassembled	\$0
0	10047	Assembled	\$301

STEERING: (see definitions and diagram below)		
STEERING HA	ANDLE:	
65120	Horizontal Steering Handle	\$0
O 65121	Vertical Steering Handle	\$0
	Aero Fixed Length Steering Handle: 9.5"	\$151
65122	Royal Blue	3131
	Aero Fixed Length Steering Handle:	
	Royal Blue	\$181
65123	Custom Length See Special Requests	
TRACK CONT	ROL:	
65115	Triangle Track Control	\$0
65116	Oval Track Control	\$0
TRACK CONTROL MOUNTING:		
65111	Bottom Mount Track Control	\$0

BRAKE MOUNTING:		
65225	Main Steering Tube	\$0
65226	Steering Handle	\$0
	=	

SEAT FRAMES: (see definitions)			
	Standard Seat Upholstery, Omit Solid		
O 75013	Seat	\$0	
75010	Aluminum Solid Seat	\$90	
75092	Carbon Solid Seat	\$301	
BUMPER WIDTH: (see definitions)			
75011	Bumper Width, 7"	\$0	
75012	Bumper Width: Custom	\$54	
	See Special Requests		








U-CAGE SIZING: (the difference in the Upper Frame Width and the Lower		
	ust NOT exceed 3.0") (see definitions and diagran	n below)
UPPER FRAM	IE WIDTH:	
O 15361	9.0" (22.9 cm) Upper Frame Width	\$0
15362	9.5" (24.1 cm) Upper Frame Width	\$0
O 15195	10.0" (25.4 cm) Upper Frame Width	\$0
O 15196	10.5" (26.7 cm) Upper Frame Width	\$0
O 15197	11.0" (27.9 cm) Upper Frame Width	\$0
O 15198	11.5" (29.2 cm) Upper Frame Width	\$0
O 15199	12.0" (30.5 cm) Upper Frame Width	\$0
O 15200	12.5" (31.8 cm) Upper Frame Width	\$0
O 15201	13.0" (33.0 cm) Upper Frame Width	\$0
<u> </u>	13.5" (34.3 cm) Upper Frame Width	\$0
<u> </u>	14.0" (35.6 cm) Upper Frame Width	\$0
O 15204	14.5" (36.8 cm) Upper Frame Width	\$0
O 15205	15.0" (38.1 cm) Upper Frame Width	\$0
O 15377	Custom Upper Frame Width	\$54
0 13377	See Specials Request Box	754
LOWER FRAN	ИЕ WIDTH:	
O 15363	9.0" (22.9 cm) Lower Frame Width	\$0
O 15364	9.5" (24.1 cm) Lower Frame Width	\$0
O 15365	10.0" (25.4 cm) Lower Frame Width	\$0
O 15366	10.5" (26.7 cm) Lower Frame Width	\$0
O 15217	11.0" (27.9 cm) Lower Frame Width	\$0
O 15218	11.5" (29.2 cm) Lower Frame Width	\$0
O 15219	12.0" (30.5 cm) Lower Frame Width	\$0
O 15220	12.5" (31.8 cm) Lower Frame Width	\$0
O 15221	13.0" (33.0 cm) Lower Frame Width	\$0
<u> 15222</u>	13.5" (34.3 cm) Lower Frame Width	\$0
<u> 15223</u>	14.0" (35.6 cm) Lower Frame Width	\$0
O 15224	14.5" (36.8 cm) Lower Frame Width	\$0
<u> 15225</u>	15.0" (38.1 cm) Lower Frame Width	\$0
<u> 15226</u>	15.5" (39.4 cm) Lower Frame Width	\$0
<u> </u>	16.0" (40.6 cm) Lower Frame Width	\$0
<u> 15228</u>	16.5" (41.9 cm) Lower Frame Width	\$0
<u> 15229</u>	17.0" (43.2 cm) Lower Frame Width	\$0
<u> </u>	Custom Lower Frame Width See Specials Request Box	\$54

See Specials Request Box	\$.
Lower frame Width Top of the Soal Rails and outsides of the Unglish	

U-CAGE SIZ	ING: (see definitions and diagram below)	
KNEE HEIGH		
O 15368	15.5" (39.4 cm) Knee Height	\$0
15305	16.0" (40.6 cm) Knee Height	\$0
15310	16.5" (41.9 cm) Knee Height	\$0
O 15306	17.0" (43.2 cm) Knee Height	\$0
O 15311	17.5" (44.5 cm) Knee Height	\$0
O 15307	18.0" (45.7 cm) Knee Height	\$0
O 15312	18.5" (47.0 cm) Knee Height	\$0
O 15308	19.0" (48.3 cm) Knee Height	\$0
O 15313	19.5" (49.5 cm) Knee Height	\$0
O 15309	20.0" (50.8 cm) Knee Height	\$0
C 15386	Custom Knee Height See Specials Request Box	\$54
KNEE WIDTH: (see definitions and diagram below)		
Note: Upper F	rame Width must be at least 2" Larger t	than Knee Width
O 15315	7.0" (17.8 cm) Knee Width	\$0
O 15316	7.5" (19.1 cm) Knee Width	\$0
O 15317	8.0" (20.3 cm) Knee Width	\$0
O 15318	8.5" (21.6 cm)Knee Width	\$0
O 15319	9.0" (22.9 cm) Knee Width	\$0
15320	9.5" (24.1 cm) Knee Width	\$0
<u> </u>	10.0" (25.4 cm) Knee Width	\$0
15322	10.5" (26.7 cm) Knee Width	\$0
O 15323	11.0" (27.9 cm) Knee Width	\$0
<u> 15324</u>	11.5" (29.2 cm) Knee Width	\$0
15325	12.0" (30.5 cm) Knee Width	\$0
<u> </u>	Custom Knee Width See Specials Request Box	\$54
l	See Specials negacit box	








U-CAGE SIZ	ING: (see diagram below)	
KNEE DEPTH		
O 15373	16" (40.6 cm) Knee Depth	\$0
O 15374	17" (43.2 cm) Knee Depth	\$0
15275	18" (45.7 cm) Knee Depth	\$0
O 15375	19" (48.3 cm) Knee Depth	\$0
15376	20" (50.8 cm) Knee Depth	\$0
<u> </u>	Custom Knee Depth See Specials Request Box	\$54
REAR SEAT H	EIGHT:	
<u> </u>	15.0" (38.1 cm) Rear Seat Height	\$0
O 15281	15.5" (39.4 cm) Rear Seat Height	\$0
O 15282	16.0" (40.6 cm) Rear Seat Height	\$0
15283	16.5" (41.9 cm) Rear Seat Height	\$0
O 15284	17.0" (43.2 cm) Rear Seat Height	\$0
O 15285	17.5" (44.5 cm) Rear Seat Height	\$0
15286	18.0" (45.7 cm) Rear Seat Height	\$0
O 15287	18.5" (47.0 cm) Rear Seat Height	\$0
<u> </u>	19.0" (48.3 cm) Rear Seat Height	\$0
<u> </u>	Custom Rear Seat Height See Specials Request Box	\$54
OVERALL LENGTH: (74" Cannot get Compacting Package)		
<u> </u>	70" (178 cm) Overall Length	\$0
O 15255	74" (188 cm) Overall Length	\$0


AXLE POSITIONS: (see diagram below)		
<u> </u>	5.0" (12.7 cm) Axle Position	\$0
15237	5.5" (14.0 cm) Axle Position	\$0
15238	6.0" (15.2 cm) Axle Position	\$0
O 15239	6.5" (16.5 cm) Axle Position	\$0
O 15240	7.0" (17.8 cm) Axle Position	\$0
O 15241	7.5" (19.0 cm) Axle Position	\$0
O 15242	8.0" (20.3 cm) Axle Position	\$0
O 15381	Custom Axle Position	\$54
0 13301	See Specials Request Box	754

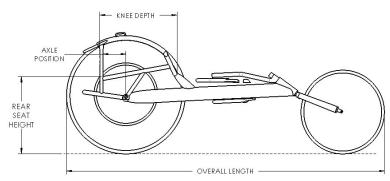

CAMBER ANGLE: (see diagram to the right)		
45005	11 Degree Camber	\$0
O 45006	12 Degree Camber	\$0
O 45007	13 Degree Camber	\$0

	-			
WHEEL SETS: (see definitions and diagram below)				
FRONT WHE	FRONT WHEEL TYPE:			
C 50150	Omit Front Wheel Build for 20"			
O 50145	20" Metal Spoked	\$0		
O 50146	20" Corima Carbon Fiber	\$722		
REAR WHEEL	TYPE:			
O 50153	Omit Rear Wheels & Axles, Build for 700C	-\$100 (credit)		
O 50143	700C High Performance (Clincher)	\$0		
O 50147	700C Corima Carbon Fiber Disc (Tubular)	\$3,004		
<u> </u>	700C Corima Carbon Fiber 4 Spoke (Tubular)	\$3,004		
FRONT TIRE TYPE:				
<u> </u>	Omit Front Tire	-\$20 (credit)		
O 50464	20" Vittoria	\$0		
O 50463	20" Panaracer	\$60		
REAR TIRE TYPE:				
<u> </u>	Omit Rear Tires	-\$20 (credit)		
<u> </u>	700C, Black (Clincher - 19mm)	\$0		
<u> </u>	700C Continental Sprinter (Tubular - 22mm)	\$84		
O 50461	700C Panaracer Rapide (Tubular - 20mm)	\$90		
<u> </u>	700C Continental Podium (Tubular - 22mm)	\$139		
·				

PUSHRIMS:	(Size Selection Required - see diagram below	v)		
RUBBER COA	RUBBER COATED PUSHRIM SIZE: (Diameter)			
<u> </u>	Omit Pushrims	-\$120 (credit)		
O 50330	12.0" Diameter Pushrims	\$0		
O 50331	12.5" Diameter Pushrims	\$0		
O 50332	13.0" Diameter Pushrims	\$0		
O 50333	13.5" Diameter Pushrims	\$0		
O 50334	14.0" Diameter Pushrims	\$0		
O 50335	14.5" Diameter Pushrims	\$0		
50336	15.0" Diameter Pushrims	\$0		
50337	15.5" Diameter Pushrims	\$0		
O 50338	16.0" Diameter Pushrims	\$0		
<u> </u>	Custom Pushrim Size (See Specials Request Box)	\$54		







UPHOLSTERY:			
MATERIAL &	MATERIAL & COLOR:		
30001	Nylon, Black Upholstery	\$0	
BACK UPHOL	BACK UPHOLSTERY:		
30028	Adjustable Tension Back Upholstery	\$0	
SEAT UPHOLSTERY:			
30016	6" Seat Upholstery Length	\$0	
30017	9" Seat Upholstery Length	\$0	
SEAT CUSHIC	SEAT CUSHION:		
30018	Seat Cushion	\$47	

FRAME COLOR:			
• 55048	Black	Stealth Black	\$0

ACCESSORIES: (Accessories may not be installed - see definitions)			
UPGRADABL	UPGRADABLE:		
POSITIONING	POSITIONING/SAFETY:		
<u> </u>	Safety Flag and Holder	\$60	
25059	Click Strap , 8" Small (see definitions)	\$90	
MAINTINANCE:			
<u></u>	Wheel Alignment Gauge	\$259	
BAGS:			
<u> </u>	Wheel bag	\$259	
TRAINING:			
<u> </u>	Garmin 520 Computer/Heart Rate Monitor	\$602	

Note: All Special requests are subject to approval, additional charges, and additional lead time

Special Request 1)	
Special Request 2)	
Special Request 3)	
Special Request 4)	
Special Request 5)	





DEFINITIONS:		
Frame/Cage:	Frame is made of carbon fiber and cage is made out of 6061 aluminum. The cage style is a U-cage.	
Assembled vs Unassembled:	If TE10046 (Unassembled) is selected the chair will require about 60 minutes of assembly upon delivery (instructions provided). If TE10047 (Assembled) is selected the chair will be fully assembled upon delivery. Shipping rate is \$150 for all shipments in the continental US. Freight quotes for shipments outside the continental US are	
Bumper Width:	Bumper width is measured from inside to inside.	
Camber Angle:	Measured from vertical to the angle of the rear tire on one side. Also stamped on the bushing.	
Aero Fixed Steering:	Fixed steering handle is lightweight at just 202 grams (100 grams lighter than the adjustable handle), the design increases aerodynamics and stiffness. Handle is Royal Blue and 9.5" long standard with custom length and additional colors available upon request.	
Solid Seat:	The solid seat provides a solid seating surface. Not recommended if customers intend to adjust the seat upholstery. Available in carbon fiber or aluminum.	
Upper Frame Width:	Measured directly above the center of the camber tube between the insides of the fenders. The difference is the Upper Frame Width and Lower Frame Width must NOT exceed 3".	
Lower Frame Width:	Measured directly above the center of the camber tube between the insides of the fenders. The difference is the Upper Frame Width and Lower Frame Width must NOT exceed 3".	
Rear Seat Height:	The rear seat height is measured from the top of the seat rail to the ground at the front of the rear upright.	
Overall Length:	Overall length is measured from the outside of the front tire to the outside of the rear tires at the furthest points.	
Axle Position:	Axle Position (or Center of Gravity) is measured from the center of the camber tube to the front of the rear upright. The measurement must be taken parallel to the ground.	
Knee Height:	Knee Height is measured from the top of the U-cage horizontal cross-member to the ground.	
Knee Depth:	Knee Depth is measured from the back of the rear upright to the front of the U-cage cross-member. The measurement must be taken parallel to the ground.	
Knee Width:	Knee width is measured between the inside of the U-cage vertical tubing.	
Wheel Size:	The Eliminator NRG Racing Wheelchair is only available with 700c rear wheels. Tires much be the same Clincher/Tubular type as wheels selected.	
Upgradable Accessories:	All Add-on options and accessories are boxed separately and may require self installation. Additionally, upgrade options and accessories may ship separately.	
Click Strap:	Single 8" click strap pad with attaching hardware for installation to fenders. This strap is in addition to the back upholstery.	
Seat Cushion:	2 inch cushion consisting of 1 inch hard foam and 1 inch soft foam.	

PRODUCT SPECIFICATIONS:		
Carbon Main Frame:	We created our fastest, lightest, and most responsive ride for racers. Increased tensile strength and modulus gives racers a smooth ride and controlled handling.	
Super Light Carbon Fork:	200 grams full carbon with a more aerodynamic design- which flows into the headtube creating cleaner lines.	
Modular Custom Seat Cage:	This hybrid tailor fit cage, gives the racer the ability to fine tune his or her positioning to put the power to the ground.	
Fenders with Side Panels:	Carbon fiber integrated and built to accommodate oversized tires.	
Field Tested:	During the 15+ months of field testing by top racers, the NRG won the LA marathon and broke 2 world records.	
World Class Manufacturing:	Lab tested at 1 million+ cycles, surpassing all of our previous designs.	
Unsurpassed Ride Quality:	From our field testers- Smooth ride, controlled road vibration and amazing power transfer.	
Next Generation Compensator:	This new and improved racing compensator has a better turning radius with zero-play confidence.	
TT Style Brake:	The multi- position brake lever, with cabling routed externally, can be positioned any where on the steering handle.	
Pushrim Size:	Measurement from outside to outside of the metal tubing of the pushrim.	
Omit Wheelsl:	When Omit Wheels is selected, product will not come with wheels, tires, tubes, pushrims or axles.	

Warranty Info:

Invacare warrants the frames and forks when purchased new and unused to be free from defects in materials and workmanship for a period of two (2) years from the date of purchase from Invacare or a dealer, with a copy of the seller's invoice required for coverage under this warranty. Invacare warrants the upholstered materials (seat and back) and remaining components of this product when purchased new and unused to be free from defects in materials and workmanship for a period of thirteen (13) months from date of purchase from Invacare or a dealer, with a copy of the seller's invoice required for coverage under this warranty