



Custom frames may have stylistic variations. Dimensional properties and tolerances committed to by Top End are defined in the Measurement Definitions Documents, which can be found on the resource center of www.topendwheelchair.com

Provider Information:		End Us	ser Information:
Date:	Name:		Height:
IVC Acct #:	Ship to Address	:	Weight (lbs.):
Contact:	Address Line 2:		Leg Length (in.):
Phone #:	City:		Hip Width (in.):
Fax/Email:	State:	Zip:	Phone #:
○ Ship to Provider	○ Ship to End	User	Email:


ORDER REQUEST	TYPE:			
O Quote	Quote and CAD	○ Order	PO#	

BASE MODEL: (see definitions)			
10020	Eliminator OSR - U Cage Frame Note: Chair ordered without front wheel, rear wheels, front tire, rear tires, pushrims or axles starts at \$4,315	\$4,605	

		-	see definitions)	
	0	10046	Unassembled	\$0
ĺ	0	10047	Assembled	\$301

FORK TYPE:			
<u>65218</u>	Aluminum Fork	\$0	
<u>65219</u>	Carbon Fiber Fork Only available with Bottom Mount Track Control Not available with Custom Fork Color Options	\$361	


FRAME OPTIONS: (see definitions and diagram below)				
SEAT TYPE:				
	Standard Seat Upholstery, Omit Solid			
75013	Seat	\$0		
<u></u>	Aluminum Solid Seat	\$90		
75092	Carbon Solid Seat	\$301		
CAMBER TUE	CAMBER TUBES:			
75018	Standard Full Camber Tube	\$0		
75015	2" Cut - Out Camber Tube	\$301		
<u></u>	3" Cut - Out Camber Tube	\$301		
75017	4" Cut - Out Camber Tube	\$301		

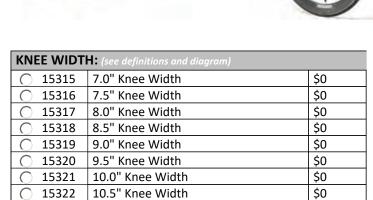

11.0" Knee Width

Custom Knee Width

(See Specials Request Box)

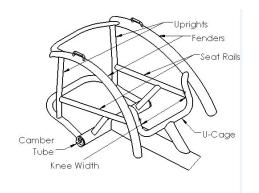

\$0

\$54

15323


15388






Custom frames may have stylistic variations. Dimensional properties and tolerances committed to by Top End are defined in the Measurement Definitions Documents, which can be found on the resource center of www.topendwheelchair.com

FRAME WIDTH: (see definitions and diagrams to the right)				
	UPPER FRAME WIDTH:			
O 15195	10.0" Upper Frame Width	\$0		
O 15196	10.5" Upper Frame Width	\$0		
<u> </u>	11.0" Upper Frame Width	\$0		
O 15198	11.5" Upper Frame Width	\$0		
<u> </u>	12.0" Upper Frame Width	\$0		
15200	12.5" Upper Frame Width	\$0		
O 15201	13.0" Upper Frame Width	\$0		
15202	13.5" Upper Frame Width	\$0		
15203	14.0" Upper Frame Width	\$0		
O 15204	14.5" Upper Frame Width	\$0		
<u> </u>	15.0" Upper Frame Width	\$0		
O 15206	15.5" Upper Frame Width	\$0		
<u> </u>	16.0" Upper Frame Width	\$0		
15208	16.5" Upper Frame Width	\$0		
15209	17.0" Upper Frame Width	\$0		
<u> </u>	Custom Upper Frame Width (See Specials Request Box)	\$54		
LOWER FRAM	ME WIDTH:			
O 15217	11.0" Lower Frame Width	\$0		
O 15218	11.5" Lower Frame Width	\$0		
O 15219	12.0" Lower Frame Width	\$0		
O 15220	12.5" Lower Frame Width	\$0		
O 15221	13.0" Lower Frame Width	\$0		
O 15222	13.5" Lower Frame Width	\$0		
O 15223	14.0" Lower Frame Width	\$0		
O 15224	14.5" Lower Frame Width	\$0		
O 15225	15.0" Lower Frame Width	\$0		
O 15226	15.5" Lower Frame Width	\$0		
<u> 15227</u>	16.0" Lower Frame Width	\$0		
<u> 15228</u>	16.5" Lower Frame Width	\$0		
O 15229	17.0" Lower Frame Width	\$0		
<u> </u>	17.5" Lower Frame Width	\$0		
O 15231	18.0" Lower Frame Width	\$0		
<u> </u>	Custom Lower Frame Width (See Specials Request Box)	\$54		

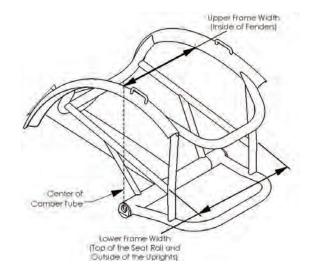

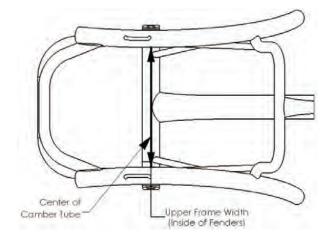






Custom frames may have stylistic variations. Dimensional properties and tolerances committed to by Top End are defined in the Measurement Definitions Documents, which can be found on the resource center of www.topendwheelchair.com

AXLE POSITION: (see diagram below)		
<u> </u>	5.0" Axle Position	\$0
15237	5.5" Axle Position	\$0
<u> </u>	6.0" Axle Position	\$0
O 15239	6.5" Axle Position	\$0
<u> </u>	7.0" Axle Position	\$0
O 15241	7.5" Axle Position	\$0
<u> </u>	8.0" Axle Position	\$0
<u> </u>	Custom Axle Position (See Specials Request Box)	\$54

KNEE DEPTH: (see definitions and diagram below)		
<u> </u>	16.0" Knee Depth	\$0
O 15273	16.5" Knee Depth	\$0
O 15374	17.0" Knee Depth	\$0
O 15274	17.5" Knee Depth	\$0
15275	18.0" Knee Depth	\$0
O 15276	18.5" Knee Depth	\$0
15375	19.0" Knee Depth	\$0
O 15278	19.5" Knee Depth	\$0
O 15376	20.0" Knee Depth	\$0
<u> </u>	Custom Knee Depth (See Specials Request Box)	\$54

SIZING: (see definitions and diagram below)		
REAR SEAT HEIGHT:		
<u> </u>	15.0" Rear Seat Height	\$0
O 15281	15.5" Rear Seat Height	\$0
15282	16.0" Rear Seat Height	\$0
15283	16.5" Rear Seat Height	\$0
O 15284	17.0" Rear Seat Height	\$0
O 15285	17.5" Rear Seat Height	\$0
O 15286	18.0" Rear Seat Height	\$0
O 15287	18.5" Rear Seat Height	\$0
O 15288	19.0" Rear Seat Height	\$0
O 15289	19.5" Rear Seat Height	\$0
<u> </u>	20.0" Rear Seat Height	\$0
<u> </u>	Custom Rear Seat Height (See Specials Request Box)	\$54
OVERALL LENGTH:		
15245	64" Overall Length	\$0
15245	66" Overall Length	\$0
15247		
)	68" Overall Length	\$0
<u> 15251</u>	70" Overall Length	\$0
15253	72" Overall Length	\$0
15255	74" Overall Length (Cannot get compact shipping)	\$0
<u> </u>	76" Overall Length (Cannot get compact shipping)	\$0
<u> </u>	Custom Overall Length (See Specials Request Box)	\$54

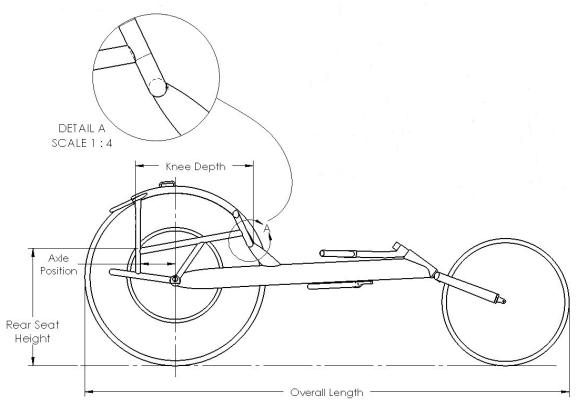






Custom frames may have stylistic variations. Dimensional properties and tolerances committed to by Top End are defined in the Measurement Definitions Documents, which can be found on the resource center of www.topendwheelchair.com

KNEE HEIGHT: (see diagram below)		
<u> </u>	16.0" Knee Height	\$0
<u> </u>	16.5" Knee Height	\$0
O 15306	17.0" Knee Height	\$0
O 15311	17.5" Knee Height	\$0
<u> </u>	18.0" Knee Height	\$0
<u> </u>	18.5" Knee Height	\$0
<u> </u>	19.0" Knee Height	\$0
15313	19.5" Knee Height	\$0
<u> </u>	20.0" Knee Height	\$0
<u> </u>	Custom Knee Height (See Specials Request Box)	\$54

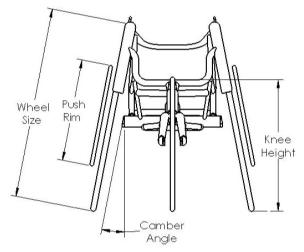

STEERING: (see diagrams below)			
STEERING HANDLE TYPE:			
<u>65120</u>	Horizontal Steering Handle	\$0	
65121	Vertical Steering Handle	\$0	
TRACK CONTROL:			
65115	Triangle Track Control	\$0	
65116	Oval Track Control	\$0	
TRACK CONTROL MOUNT:			
O 65110	Top Mount Track Control	\$0	
65111	Bottom Mount Track Control	\$0	



TRACK	CONTROL:
Triangle	Oval

CAMBER ANGLE: (see definitions and diagram to the left)		
45005	11 Degree Camber	\$0
45006	12 Degree Camber	\$0
45007	13 Degree Camber	\$0
45008	15 Degree Camber	\$0

WHEEL SETS: (see definitions and diagram to the left)			
FRONT WHEEL TYPE:			
O 50150	Omit Front Wheel Build for 20"	-\$30 (credit)	
O 50145	20" Metal Spoked	\$0	
O 50146	20" Corima Carbon Fiber	\$722	
REAR WHEEL	TYPE:		
O 50153	Omit Rear Wheels & Axles, Build for 700C	-\$100 (credit)	
O 50152	Omit Rear Wheels & Axles, Build for 26"	-\$100 (credit)	
<u></u>	High Performance, 700C (Clincher)	\$0	
O 50139	High Performance, 26" (Clincher)	\$120	
O 50147	Corima Carbon Fiber Disc, 700C (Tubular)	\$3,004	
<u> </u>	Corima Carbon Fiber 4 Spoke, 700C (Tubular)	\$3,004	
FRONT TIRE	TYPE:		
<u> </u>	Omit Front Tire	-\$20 (credit)	
<u> </u>	20" Vittoria	\$0	
<u> </u>	20" Panaracer	60	
REAR TIRE T	YPE:		
<u> </u>	Omit Rear Tires	-\$20 (credit)	
O 50236	26" Panaracer (Clincher - 23mm)	\$0	
<u> </u>	700C, Black (Clincher - 19mm)	\$0	
<u> </u>	700C Continental Sprinter (Tubular - 22mm)	\$84	
O 50461	700C Panaracer Rapide (Tubular - 20mm)	\$90	
<u></u>	700C Continental Podium (Tubular - 22mm)	\$139	

PUSHRIMS: (Size Selection Required - see diagram)		
RUBBER COA	ATED PUSHRIM SIZE: (Diameter)	
<u> </u>	Omit Pushrims	-\$120 (credit)
O 50330	12.0" Diameter Pushrims	\$0
O 50331	12.5" Diameter Pushrims	\$0
O 50332	13.0" Diameter Pushrims	\$0
O 50333	13.5" Diameter Pushrims	\$0
O 50334	14.0" Diameter Pushrims	\$0
O 50335	14.5" Diameter Pushrims	\$0
O 50336	15.0" Diameter Pushrims	\$0
O 50337	15.5" Diameter Pushrims	\$0
<u> </u>	16.0" Diameter Pushrims	\$0
<u> </u>	16.5" Diameter Pushrims	\$0
<u> </u>	Custom Pushrim Size (See Specials Request Box)	\$54





Custom frames may have stylistic variations. Dimensional properties and tolerances committed to by Top End are defined in the Measurement Definitions Documents, which can be found on the resource center

	can be found on	the resource cer		
UPHOLSTE	UPHOLSTERY:			
MATERIAL & COLOR:				
 30001 Nylon, Black Upholstery \$0 				
BACK UPHOLSTERY STYLE:				
30028 Adjustable Tension Back Upholstery \$0				
SEAT UPHOLSTERY:				
30016	6" Seat Upholstery Length	\$0		
30017	9" Amputee Seat Upholstery Length	\$0		
SEAT CUSHIONS:				
O 30018 Soft Seat Cushion \$47				
ACCESSORIES:				
SAFETY:				
O 25015	Safety Light, Front (White)	\$18		

ACCESSORIES: SAFETY:				
○ 25015 Safety Light, Front (White) \$18 ○ 25016 Safety Light, Rear (Red) \$18 ○ 25073 Safety Flag and Mount \$60 POSITIONING: ○ 25001 Click Strap, 8" Small \$90 ○ 25002 Click Strap, 10" Medium \$97 ○ 25003 Click Strap, 12" Large \$109 PERFORMANCE ENHANCEMENT: ○ 25024 Cordless Computer \$120				
○ 25016 Safety Light, Rear (Red) \$18 ○ 25073 Safety Flag and Mount \$60 POSITIONING: ○ 25001 Click Strap, 8" Small \$90 ○ 25002 Click Strap, 10" Medium \$97 ○ 25003 Click Strap, 12" Large \$109 PERFORMANCE ENHANCEMENT: ○ 25024 Cordless Computer \$120				
○ 25073 Safety Flag and Mount \$60 POSITIONING: ○ 25001 Click Strap, 8" Small \$90 ○ 25002 Click Strap, 10" Medium \$97 ○ 25003 Click Strap, 12" Large \$109 PERFORMANCE ENHANCEMENT: ○ 25024 Cordless Computer \$120				
POSITIONING: \$90 25001 Click Strap, 8" Small \$90 25002 Click Strap, 10" Medium \$97 25003 Click Strap, 12" Large \$109 PERFORMANCE ENHANCEMENT: 25024 Cordless Computer \$120				
25001 Click Strap, 8" Small \$90 25002 Click Strap, 10" Medium \$97 25003 Click Strap, 12" Large \$109 PERFORMANCE ENHANCEMENT: 25024 Cordless Computer \$120				
25002 Click Strap, 10" Medium \$97 25003 Click Strap, 12" Large \$109 PERFORMANCE ENHANCEMENT: 25024 Cordless Computer \$120				
Click Strap, 12" Large \$109 PERFORMANCE ENHANCEMENT: C 25024 Cordless Computer \$120				
PERFORMANCE ENHANCEMENT: 25024 Cordless Computer \$120				
Cordless Computer \$120				
	PERFORMANCE ENHANCEMENT:			
C 25022 14/1 14/2 1.0				
25022 Wheel Alignment Gauge \$259				
TRAINING:				
Indoor training roller available but sold and shipped separately.				
C 25076 Garmin Computer/Heart Rate Monitor \$602				
BAGS:				
C 25031 Wheel Bag \$259				

	OR OPT	vheelchair.		
	ME COLO	PR:		
0	55018	Black	Wet Black	\$0
0	55019	Black	Black Prism	\$0
0	55017	Black	Stealth Black	\$0
\bigcirc	55010	Blue	Midnight Blue	\$0
\bigcirc	55011	Blue	Royal Blue	\$0
\bigcirc	55012	Blue	Electric Blueberry	\$0
\bigcirc	55023	Grey	Stealth Grey	\$0
\bigcirc	55053	Green	Agriculture Green	\$0
\bigcirc	55008	Green	Grasshopper Green	\$0
\bigcirc	55054	Green	Neon Green	\$0
\circ	55006	Orange	Sunkissed Orange	\$0
\bigcirc	55005	Orange	Simple Orange	\$0
\bigcirc	55051	Orange	Neon Orange	\$0
\bigcirc	55015	Pink	Bubblegum Pink	\$0
\bigcirc	55057	Pink	Neon Pink	\$0
\bigcirc	55055	Purple	Lilac Purple	\$0
\bigcirc	55001	Red	Simple Red	\$0
\bigcirc	55002	Red	Tangerine Red	\$0
\bigcirc	55003	Red	Raspberry Red	\$0
\bigcirc	55050	Red	Neon Red	\$0
\bigcirc	55020	Silver	Silver Metallic	\$0
\bigcirc	55016	White	White Snow	\$0
\bigcirc	55007	Yellow	Safety Yellow	\$0
\circ	55052	Yellow	Neon Yellow	\$0
\bigcirc	55066	Raw	Buffed Aluminum	\$421
FOR	K COLOR	:		· ·
\bigcirc	55068	Black	Flat Black	\$0
$\widetilde{\bigcirc}$	55041	Black	Wet Black	\$120
Ŏ	55042	Black	Black Prism	\$120
Ŏ	55040	Black	Stealth Black	\$120
Õ	55033	Blue	Midnight Blue	\$120
Ŏ	55034	Blue	Royal Blue	\$120
$\overline{0}$	55035	Blue	Electric Blueberry	\$120
$\widetilde{\circ}$	55046	Grey	Stealth Grey	\$120
$\overline{\circ}$	55061	Green	Agriculture Green	\$120
$\overline{0}$	55031	Green	Grasshopper Green	\$120
ŏ	55062	Green	Neon Green	\$120
$\overline{\circ}$	55029	Orange	Sunkissed Orange	\$120
0	55028	Orange	Simple Orange	\$120
$\frac{\circ}{\circ}$	55059	Orange	Neon Orange	\$120
$\frac{\circ}{\circ}$	55038	Pink	Bubblegum Pink	\$120
Ö	55065	Pink	Neon Pink	\$120
$\frac{\circ}{\circ}$	55063	Purple	Lilac Purple	\$120
0	55024	Red	Simple Red	\$120
0		Red	Tangerine Red	\$120
0	55025	Red	Raspberry Red	\$120
0	55026		Neon Red	\$120
0	55058	Red		
0	55043	Silver	Silver Metallic	\$120
0	55039	White	White Snow	\$120
	55030	Yellow	Safety Yellow	\$120
0	55060	Yellow N/A	Neon Yellow Carbon Fiber Fork Chosen	\$120 \$0
\circ	55077	IN/A	Carbon Fiber Fork Chosen	γυ





Custom frames may have stylistic variations. Dimensional properties and tolerances committed to by Top End are defined in the Measurement Definitions Documents, which can be found on the resource center of www.topendwheelchair.com

DEFINITIONS:		
Assembled vs Unassembled:	1 ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' '	
Open V Cage:	Recommended for beginner level athletes with T-10 SCI and above as that level of injury requires more of a bucket type seat. Designed for people who prefer the seated position and/or may also want to kneel. This cage does require good transfer skills.	
U Cage:	Recommended for experienced customers who exclusively use the kneeling position. Customers tend to have good balance and are T-10 injury level or below. U cage includes an aluminum knee plate for extra rigidity.	
I Cage:	I Cage is the easiest transfer style to use but cannot be converted to a kneeling position. This style is typically used by higher level injury athletes who sit in the traditional feet forward position with an adjustable fixed style footrest.	
Aluminum Solid Seat:	Provides a solid surface. Not recommended if customers intend to adjust the seat upholstery.	
Carbon Fiber Provides a solid Carbon fiber surface. Not recommended if custome intend to adjust the seat upholstery.		
Cut Out Camber Tube:	nosition requires additional snace for their lower legs. This additional	
Camber Angle: Angle of the wheels. Measured from vertical to the angle of the read on one side.		
Upper Frame Width:	Measured directly above the center of the Camber Tube, between the insides of the Fenders. Maximum width is 17".	
Lower Frame Width:	Measured at the top of the Seat Rail and from the outside of the Uprights. Maximum width is 18".	
Rear Seat Height:	Measured from the top of the Seat Rail to the ground.	
Overall Length:	Measured from the further most outsides of the front & rear tires.	
Axle Position:	Measured from the center of the Camber Tube to the front of the rear Upright. (This needs to be parallel to the ground.)	
Knee Height:	Measured from the top of the U-Cage Horizontal Cross Member to the ground.	
Knee Depth:	Measured from the back of the Rear Upright to the front of the U-Cage Cross member. (This needs to be parallel to the ground.)	
Knee Width:	Measured between the inside of the U-Cage vertical tubing.	
Wheel Size:	Eliminator OSR Racing wheelchairs use 700c and 26" size wheels with threaded axles. A standard threaded axle 700c metal spoke wheel with inflated black primo tire measures 26-1/2" +/- 1/8" from outside to outside of the tire. A standard threaded axle 26" metal spoke wheel with inflated Panaracer tire measures 24-1/2" +/- 1/8" from outside to outside of the tire.	
Pushrim Size:	Measurement from outside to outside of the metal tubing of the pushrim.	

PRODUCT SPECIFICATIONS:	
Weight Capacity:	250 pounds, 113 Kilograms
Approximate Chair Weight:	21 pounds, 9.5 Kilograms
Approximate Box Weight:	37 pounds, 17 Kilograms
Box Dimensions:	77" X 27" X 23"

NOTES:		
Tubular Tires:	A tubular tire (or sew-up) is a bicycle tire that is stitched closed around the inner tube to form a torus. The combination is then glued onto the wheel.	
Clincher Tires:	A clincher tire uses a separate airtight inner tube enclosed by the rim which supports the tire carcass and maintains the bead lock. An advantage of this system is that the inner tube can be easily accessed in the case of a leak to be patched or replaced.	
Front Tire:	Vittoria tire has a thicker tread pattern and is great for training and racing.	
Rear Tire Options:	- 700c Continental Sprinter tires are great for racing and training - 700c Continental Podium are thinner lighter, better for racing	
Fenders:	Fenders are made to accommodate a tire that is up to 25mm.	
Omit Wheels:	When omit wheels is selected, product will not come with wheels, tires, tubes, pushrims or axles.	

Warranty Info:

Invacare warrants the frames and fork when purchased new and unused to be free from defects in materials and workmanship for a period of two (2) years from the date of purchase from Invacare or a dealer, with a copy of the seller's invoice required for coverage under this warranty. Invacare warrants the upholstered materials (seat and back) and remaining components of this product when purchased new and unused to be free from defects in materials and workmanship for a period of thirteen (13) months from date of purchase from Invacare or a dealer, with a copy of the seller's invoice required for coverage under this warranty

Note: All special requests are subject to approval, additional charges, and additional lead time Special Request 1) Special Request 2) Special Request 3) Special Request 4) Special Request 5)