Top End®






PROVIDER / CUSTOMER INFORMATION: Provider Information: End User Information: Athlete Name: Contact Name: Acct #: Ship to Address: Contact: State: Phone #: Zip/Postal Code: Phone: Email: Fax/Email: Ship to End User Ship to Provider

ORDER REQUEST TYPE:			
○ Order		PO#	
BASE MODEL: (see definitions)			
10021 Eliminator OSR - I Cage Frame	\$4.999		

•	10021	Eliminator OSR - I Cage Frame	\$4,999
Ass	embly:	see definitions)	
•	10046	Unassembled	\$0
FOF	RK TYPE:		
•	65219	Carbon Fiber Fork	\$0
FRA	ME OPT	IONS: (see definitions and diagram below)	
SEA	T TYPE:		
		Standard Seat Upholstery, Omit Solid	
\circ	75013	Seat	\$0
\circ	75010	Aluminum Solid Seat	\$90
\circ	75092	Carbon Solid Seat	\$301
CAMBER TUBES:			
	75018	Standard Full Camber Tube	\$0
\circ	75015	2" Cut - Out Camber Tube	\$301
\circ	75016	3" Cut - Out Camber Tube	\$301
	75017	4" Cut - Out Camber Tube	\$301

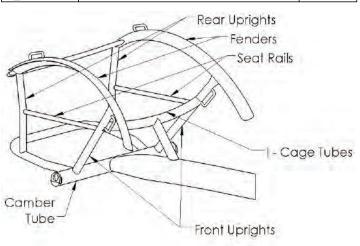









UPPER FRAME WIDTH:			
O 15361	9.0" (22.9 cm) Upper Frame Width	\$0	
O 15362	9.5" (24.1 cm) Upper Frame Width	\$0	
O 15195	10.0" (25.4 cm) Upper Frame Width	\$0	
O 15196	10.5" (26.7 cm) Upper Frame Width	\$0	
O 15197	11.0" (27.9 cm) Upper Frame Width	\$0	
O 15198	11.5" (29.2 cm) Upper Frame Width	\$0	
O 15199	12.0" (30.5 cm) Upper Frame Width	\$0	
O 15200	12.5" (31.8 cm) Upper Frame Width	\$0	
O 15201	13.0" (33.0 cm) Upper Frame Width	\$0	
<u> </u>	13.5" (34.3 cm) Upper Frame Width	\$0	
<u> </u>	14.0" (35.6 cm) Upper Frame Width	\$0	
<u> </u>	14.5" (36.8 cm) Upper Frame Width	\$0	
<u> </u>	15.0" (38.1 cm) Upper Frame Width	\$0	
<u> </u>	Custom Upper Frame Width See Specials Request Box	\$54	
LOWER FRAM			
<u> 15363</u>	9.0" (22.9 cm) Lower Frame Width	\$0	
O 15364	9.5" (24.1 cm) Lower Frame Width	\$0	
O 15365	10.0" (25.4 cm) Lower Frame Width	\$0	
O 15366	10.5" (26.7 cm) Lower Frame Width	\$0	
O 15217	11.0" (27.9 cm) Lower Frame Width	\$0	
O 15218	11.5" (29.2 cm) Lower Frame Width	\$0	
O 15219	12.0" (30.5 cm) Lower Frame Width	\$0	
O 15220	12.5" (31.8 cm) Lower Frame Width	\$0	
O 15221	13.0" (33.0 cm) Lower Frame Width	\$0	
O 15222	13.5" (34.3 cm) Lower Frame Width	\$0	
O 15223	14.0" (35.6 cm) Lower Frame Width	\$0	
O 15224	14.5" (36.8 cm) Lower Frame Width	\$0	
O 15225	15.0" (38.1 cm) Lower Frame Width	\$0	
O 15226	15.5" (39.4 cm) Lower Frame Width	\$0	
<u> </u>	16.0" (40.6 cm) Lower Frame Width	\$0	
O 15228	16.5" (41.9 cm) Lower Frame Width	\$0	
O 15229	17.0" (43.2 cm) Lower Frame Width	\$0	
<u> </u>	Custom Lower Frame Width See Specials Request Box	\$54	

O 55105	Bomber Orange	Frame Color: Bomber Orange	\$0
O 55066	Buffed Aluminum	Frame Color: Buffed Aluminum	\$421
O 55102	Flat Black	Frame Color: Flat Black	\$0
O 55056	Purple Death	Frame Color: Purple Death	\$0
O 55103	Wrinkle Black	Frame Color: Wrinkle Black	\$0
O 15230		Lower Frame Width 17.5"	\$0
O 15231		Lower Frame Width 18"	\$0
O 15206		Upper Frame Width 15.5"	\$0
O 15207		Upper Frame Width 16"	\$0
O 15208		Upper Frame Width 16.5"	\$0
O 15209		Upper Frame Width 17"	\$0








AXLE POSITION: (see diagram below)		
<u> </u>	5.0" Axle Position	\$0
15237	5.5" Axle Position	\$0
15238	6.0" Axle Position	\$0
15239	6.5" Axle Position	\$0
O 15240	7.0" Axle Position	\$0
O 15241	7.5" Axle Position	\$0
O 15242	8.0" Axle Position	\$0
O 15381	Custom Axle Position (See Specials Request Box)	\$54


SIZING: (see definitions and diagram below)			
CAGE DEPTH			
O 15392	14.0" Cage Depth	\$0	
O 15393	14.5" Cage Depth	\$0	
O 15270	15.0" Cage Depth	\$0	
O 15394	15.5" Cage Depth	\$0	
O 15395	16.0" Cage Depth	\$0	
O 15396	16.5" Cage Depth	\$0	
O 15385	Custom Cage Depth (See Specials Request Box)	\$45	
OVERALL LEN	OVERALL LENGTH:		
<u> </u>	64" Overall Length	\$0	
O 15247	66" Overall Length	\$0	
O 15249	68" Overall Length	\$0	
O 15251	70" Overall Length	\$0	
15253	72" Overall Length	\$0	
15255	74" Overall Length (Cannot get compacting package)	\$0	
15257	76" Overall Length (Cannot get compacting package)	\$0	
<u> </u>	Custom Overall Length (See Specials Request Box)	\$54	

SEAT HEIGH	SEAT HEIGHT: (see definitions and diagram below)			
FRONT SEAT	FRONT SEAT HEIGHT:			
<u> </u>	16.0" Front Seat Height	\$0		
O 15296	16.5" Front Seat Height	\$0		
O 15297	17.0" Front Seat Height	\$0		
O 15298	17.5" Front Seat Height	\$0		
15299	18.0" Front Seat Height	\$0		
O 15300	18.5" Front Seat Height	\$0		
O 15301	19.0" Front Seat Height	\$0		
15302	19.5" Front Seat Height	\$0		
O 15303	20.0" Front Seat Height	\$0		
O 15382	Custom Front Seat Height	\$54		
15382	(See Specials Request Box)	٦٥٩		
REAR SEAT H	EIGHT:			
15280	15.0" Rear Seat Height	\$0		
O 15281	15.5" Rear Seat Height	\$0		
15282	16.0" Rear Seat Height	\$0		
O 15283	16.5" Rear Seat Height	\$0		
O 15284	17.0" Rear Seat Height	\$0		
O 15285	17.5" Rear Seat Height	\$0		
O 15286	18.0" Rear Seat Height	\$0		
15287	18.5" Rear Seat Height	\$0		
<u> </u>	19.0" Rear Seat Height	\$0		
15289	19.5" Rear Seat Height	\$0		
<u> </u>	20.0" Rear Seat Height	\$0		
<u> </u>	Custom Rear Seat Height (See Specials Request Box)	\$54		

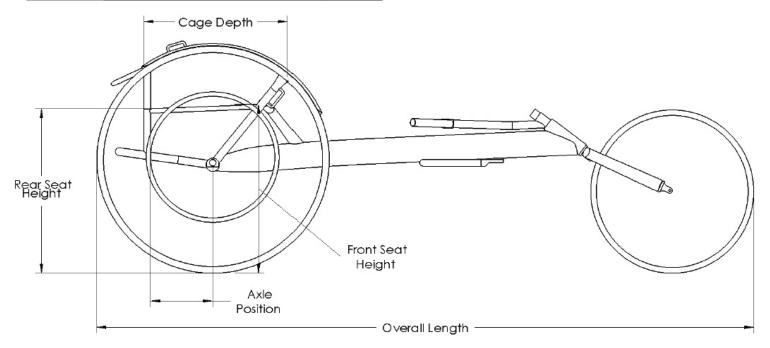



CAMBER ANGLE: (see definitions and diagram below)		
<u> 45005</u>	11 Degree Camber	\$0
45006	12 Degree Camber	\$0
45007	13 Degree Camber	\$0



STEERING: (see diagram below)			
STEERING HANDLE TYPE:			
<u>65120</u>	Horizontal Steering Handle	\$0	
O 65121	Vertical Steering Handle	\$0	
TRACK CONTROL:			
O 65115	Triangle Track Control	\$0	
O 65116	Oval Track Control	\$0	
TRACK CONTROL MOUNT:			
<u>65111</u>	Bottom Mount Track Control	\$0	





WHEEL SETS	WHEEL SETS: (see definitions and diagram to the left)		
FRONT WHEEL TYPE:			
O 50145	20" Metal Spoked	\$0	
O 50146	20" Corima Carbon Fiber	\$605	
REAR WHEEL	TYPE:		
<u> </u>	High Performance, 700C (Clincher)	\$0	
O 50139	High Performance, 26" (Clincher)	\$120	
O 50147	Corima Carbon Fiber Disc, 700C (Tubular)	\$2,178	
C 50148	Corima Carbon Fiber 4 Spoke, 700C	\$2,178	
30146	(Tubular)	72,176	
FRONT TIRE	ГҮРЕ:		
O 50464	20" Vittoria	\$0	
O 50463	20" Panaracer	\$60	
REAR TIRE TYPE:			
<u> </u>	26" Panaracer (Clincher - 23mm)	\$0	
O 50460	700C, Black (Clincher - 19mm)	\$0	
O 50241	700C Continental Sprinter (Tubular - 22mm)	\$84	
O 50461	700C Panaracer Rapide (Tubular - 20mm)	\$90	
O 50462	700C Continental Podium (Tubular - 22mm)	\$139	

PUSHRIMS: (Size Selection Required - see diagram)				
RUBBER COA	RUBBER COATED PUSHRIM SIZE: (Diameter)			
<u> </u>	Omit Pushrims	-\$120 (credit)		
O 50330	12.0" Diameter Pushrims	\$0		
O 50331	12.5" Diameter Pushrims	\$0		
O 50332	13.0" Diameter Pushrims	\$0		
O 50333	13.5" Diameter Pushrims	\$0		
O 50334	14.0" Diameter Pushrims	\$0		
O 50335	14.5" Diameter Pushrims	\$0		
O 50336	15.0" Diameter Pushrims	\$0		
O 50337	15.5" Diameter Pushrims	\$0		
O 50338	16.0" Diameter Pushrims	\$0		
<u> </u>	Custom Pushrim Size (See Specials Request Box)	\$54		

UPHOLSTERY:			
MATERIAL & COLOR:			
30001	Nylon, Black Upholstery	\$0	
BACK UPHO	BACK UPHOLSTERY STYLE:		
30028	Adjustable Tension Back Upholstery	\$0	
SEAT UPHOLSTERY:			
30016	6" Seat Upholstery Length	\$0	
SEAT CUSHIONS:			
30018	Soft Seat Cushion	\$47	

ACCESSORIES:				
SAFETY:				
25073	Safety Flag and Mount	\$60		
POSITIONING:				
60014	Clamp-on Footrest, Adjustable	\$301		





FRAME COLOR:				
0	55018	Black	Wet Black	\$0
0	55019	Black	Black Prism	\$0
0	55017	Black	Stealth Black	\$0
0	55010	Blue	Midnight Blue	\$0
0	55011	Blue	Royal Blue	\$0
0	55012	Blue	Electric Blueberry	\$0
0	55023	Grey	Stealth Grey	\$0
0	55053	Green	Agriculture Green	\$0
0	55008	Green	Grasshopper Green	\$0
0	55054	Green	Neon Green	\$0
0	55006	Orange	Sunkissed Orange	\$0
0	55005	Orange	Simple Orange	\$0
0	55051	Orange	Neon Orange	\$0
0	55015	Pink	Bubblegum Pink	\$0
0	55057	Pink	Neon Pink	\$0
0	55055	Purple	Lilac Purple	\$0
0	55001	Red	Simple Red	\$0
0	55002	Red	Tangerine Red	\$0
0	55003	Red	Raspberry Red	\$0
0	55050	Red	Neon Red	\$0
	55020	Silver	Silver Metallic	\$0
	55016	White	White Snow	\$0
0	55007	Yellow	Safety Yellow	\$0
	55052	Yellow	Neon Yellow	\$0
0	55070	Raw	Buffed Aluminum	\$0
0	55090	Bronze	Las Vegas Bronze	\$0
\bigcirc	55091	Green	Mint Green	\$0
0	55092	Pink	Light Pink	\$0
0	55093	Grey	Fighter Jet Grey	\$0
0	55094	Blue	Tiffany Blue	\$0
	55095	Blue	Carolina Blue	\$0



DEFINITIONS:		
Assembled vs Unassembled:	If TE10046 (Unassembled) is selected the chair will require about 60 minutes of assembly upon delivery (instructions provided). If TE10047 (Assembled) is selected the chair will be fully assembled upon delivery. Shipping rate is \$325 for all shipments in the continental US. Freight quotes for shipments outside the continental US are available upon request.	
Open V cage:	Recommended for beginner level athletes with T-10 SCI and above as that level of injury requires more of a bucket type seat. Designed for people who prefer the seated position and/or may also want to kneel. This cage does require good transfer skills.	
U Cage:	Recommended for experienced customers who exclusively use the kneeling position. Customers tend to have good balance and are T-10 injury level or below. U cage includes an aluminum knee plate for extra rigidity.	
l cage:	I Cage is the easiest transfer style to use but cannot be converted to a kneeling position. This style is typically used by higher level injury athletes who sit in the traditional feet forward position with an adjustable fixed style footrest.	
Aluminum Solid Seat:	Provides a solid aluminum surface. Not recommended if customers intend to adjust the seat upholstery.	
Carbon Fiber Solid Seat:	Provides a solid Carbon fiber surface. Not recommended if customers intend to adjust the seat upholstery.	
Cut Out Camber Tube:	The distance from the front of the cut Camber Tube to the back of the support tube. Recommended when a customer who desires a kneeling position requires additional space for their lower legs. This additional space is accomplished by removing the center portion of the camber tube after welding. Creates more room for legs with low seat heights.	
Camber Angle:	Angle of the wheels. Measured from vertical to the angle of the rear tire on one side.	
Upper Frame Width:	Measured directly above the center of the Camber Tube, between the insides of the Fenders. Maximum width is 17".	
Lower Frame Width:	Measured at the top of the Seat Rail and from the outside of the Uprights. Maximum width is 18".	
Rear Seat Height:	Measured from the top of the Seat Rail to the ground.	
Overall Length:	Measured from the further most outsides of the front & rear tires.	
Axle Position:	Measured from the center of the Camber Tube to the front of the rear Upright. (This needs to be parallel to the ground.)	
Front Seat Height:	Measured from the top front end of the seat rail to the ground.	
Cage Depth:	Measured from the back of the rear upright to the top and front of the front upright. (This needs to be parallel to the ground.)	
Wheel Size:	Eliminator OSR Racing wheelchairs use 700c and 26" size wheels with threaded axles. A standard threaded axle 700c metal spoke wheel with inflated black primo tire measures 26-1/2" +/- 1/8" from outside to outside of the tire. A standard threaded axle 26" metal spoke wheel with inflated Panaracer tire measures 24-1/2" +/- 1/8" from outside to outside of the tire.	
Pushrim Size:	Measurement from outside to outside of the metal tubing of the pushrim.	

PRODUCT SPECIFICATIONS:	
Weight Capacity:	250 pounds, 113 Kilograms
Approximate Chair Weight:	21 pounds, 9.5 Kilograms
Approximate Box Weight:	37 pounds, 17 Kilograms
Box Dimensions:	77" X 27" X 23"

NOTES:		
Tubular Tires:	A tubular tire (or sew-up) is a bicycle tire that is stitched closed around the inner tube to form a torus. The combination is then glued onto the wheel.	
Clincher Tires:	A clincher tire uses a separate airtight inner tube enclosed by the rim which supports the tire carcass and maintains the bead lock. An advantage of this system is that the inner tube can be easily accessed in the case of a leak to be patched or replaced.	
Front Tire:	Vittoria tire has a thicker tread pattern and is great for training and racing.	
Rear Tire Options:	- 700c Continental Sprinter tires are great for racing and training - 700c Continental Podium are thinner lighter, better for racing	
Fenders:	Fenders are made to accommodate a tire that is up to 25mm.	
Omit Wheels:	When omit wheels is selected, product will not come with wheels, tires, tubes, pushrims or axles.	

Warranty Info:

Top End warrants the frames and forks when purchased new and unused to be free from defects in materials and workmanship for a period of two (2) years from the date of purchase from Top End or a dealer, with a copy of the seller's invoice required for coverage under this warranty. Top End warrants the upholstered materials (seat and back) and remaining components of this product when purchased new and unused to be free from defects in materials and workmanship for a period of thirteen (13) months from date of purchase from Top End or a dealer, with a copy of the seller's invoice required for coverage under this warranty

Note: All special requests are subject to approval, additional charges, and additional lead time

Special Request 1)	
Special Request 2)	
Special Request 3)	
Special Request 4)	
Special Request 5)	