# Top End®





PROVIDER / CUSTOMER INFORMATION:			
Provider Information:	End User Information:		
Date:	Contact Name: Athlete Name:		
Acct #:	Ship to Address:		
Contact:	City:	State:	
Phone #:	Zip/Postal Code:	Phone:	
Fax/Email:	Email:		
Ship to Provider	Ship to End User		

ORDER REQUEST TYPE:		
○ Order	PO #	


BASE MODEL: (see definitions)		
<ul><li>10020</li></ul>	Eliminator OSR - U Cage Frame	\$4,999

Assembly: (see definitions)			
•	10046	Unassembled	\$0

FO	RK TYPE:		
•	65219	Carbon Fiber Fork	\$0



FRAME OPTIONS: (see definitions and diagram below)			
SEAT TYPE:	SEAT TYPE:		
	Standard Seat Upholstery, Omit Solid		
75013	Seat	\$0	
<b>75010</b>	Aluminum Solid Seat	\$90	
75092	Carbon Solid Seat	\$301	
CAMBER TUBES:			
75018	Standard Full Camber Tube	\$0	
75015	2" Cut - Out Camber Tube	\$301	
75016	3" Cut - Out Camber Tube	\$301	
75017	4" Cut - Out Camber Tube	\$301	





KNEE WIDTH: (see definitions and diagram)		
O 15315	7.0" Knee Width	\$0
O 15316	7.5" Knee Width	\$0
<b>15317</b>	8.0" Knee Width	\$0
<b>15318</b>	8.5" Knee Width	\$0
O 15319	9.0" Knee Width	\$0
<u> </u>	9.5" Knee Width	\$0
O 15321	10.0" Knee Width	\$0
<b>15322</b>	10.5" Knee Width	\$0
<b>15323</b>	11.0" Knee Width	\$0
C 15388	Custom Knee Width (See Specials Request Box)	\$54



## Top End Eliminator™ U Cage OSR Racing Wheelchair

UPPER FRAM	1E WIDTH:	
O 15361	9.0" (22.9 cm) Upper Frame Width	\$0
O 15362	9.5" (24.1 cm) Upper Frame Width	\$0
O 15195	10.0" (25.4 cm) Upper Frame Width	\$0
O 15196	10.5" (26.7 cm) Upper Frame Width	\$0
O 15197	11.0" (27.9 cm) Upper Frame Width	\$0
O 15198	11.5" (29.2 cm) Upper Frame Width	\$0
O 15199	12.0" (30.5 cm) Upper Frame Width	\$0
<u> </u>	12.5" (31.8 cm) Upper Frame Width	\$0
O 15201	13.0" (33.0 cm) Upper Frame Width	\$0
<u> </u>	13.5" (34.3 cm) Upper Frame Width	\$0
<u> </u>	14.0" (35.6 cm) Upper Frame Width	\$0
O 15204	14.5" (36.8 cm) Upper Frame Width	\$0
O 15205	15.0" (38.1 cm) Upper Frame Width	\$0
<u> 15377</u>	Custom Upper Frame Width	\$54
13377	See Specials Request Box	754
LOWER FRAI	ME WIDTH:	
<u> </u>	9.0" (22.9 cm) Lower Frame Width	\$0
<u> </u>	9.5" (24.1 cm) Lower Frame Width	\$0
<u> </u>	10.0" (25.4 cm) Lower Frame Width	\$0
<u> </u>	10.5" (26.7 cm) Lower Frame Width	\$0
<u> </u>	11.0" (27.9 cm) Lower Frame Width	\$0
<u> </u>	11.5" (29.2 cm) Lower Frame Width	\$0
<u> 15219</u>	12.0" (30.5 cm) Lower Frame Width	\$0
<u> </u>	12.5" (31.8 cm) Lower Frame Width	\$0
<u> </u>	13.0" (33.0 cm) Lower Frame Width	\$0
<u> 15222</u>	13.5" (34.3 cm) Lower Frame Width	\$0
<u> 15223</u>	14.0" (35.6 cm) Lower Frame Width	\$0
<u> </u>	14.5" (36.8 cm) Lower Frame Width	\$0
<u> 15225</u>	15.0" (38.1 cm) Lower Frame Width	\$0
<u> 15226</u>	15.5" (39.4 cm) Lower Frame Width	\$0
<u> 15227</u>	16.0" (40.6 cm) Lower Frame Width	\$0
<u> </u>	16.5" (41.9 cm) Lower Frame Width	\$0
<u> </u>	17.0" (43.2 cm) Lower Frame Width	\$0
<u> </u>	Custom Lower Frame Width See Specials Request Box	\$54





UPHOLSTERY:			
MATERIAL &	MATERIAL & COLOR:		
<ul><li>30001</li></ul>	Nylon, Black Upholstery	\$0	
BACK UPHOL	STERY STYLE:		
<ul><li>30028</li></ul>	Adjustable Tension Back Upholstery	\$0	
SEAT UPHOLSTERY:			
30016	6" Seat Upholstery Length	\$0	
30017	9" Amputee Seat Upholstery Length	\$0	
SEAT CUSHIONS:			
30018	Soft Seat Cushion	\$47	

ACCESSORIES:		
SAFETY:		
C 25073	Safety Flag and Mount	\$60




## Top End Sports® Eliminator™ U Cage OSR Racing Wheelchair

AXLE POSITION: (see diagram below)		
<u> </u>	5.0" Axle Position	\$0
<b>15237</b>	5.5" Axle Position	\$0
O 15238	6.0" Axle Position	\$0
O 15239	6.5" Axle Position	\$0
<u> </u>	7.0" Axle Position	\$0
O 15241	7.5" Axle Position	\$0
O 15242	8.0" Axle Position	\$0
<u> </u>	Custom Axle Position (See Specials Request Box)	\$54

KNEE DEPTH: (see definitions and diagram below)		
<u> </u>	16.0" Knee Depth	\$0
<b>15273</b>	16.5" Knee Depth	\$0
O 15374	17.0" Knee Depth	\$0
O 15274	17.5" Knee Depth	\$0
<b>15275</b>	18.0" Knee Depth	\$0
O 15276	18.5" Knee Depth	\$0
<b>15375</b>	19.0" Knee Depth	\$0
O 15278	19.5" Knee Depth	\$0
O 15376	20.0" Knee Depth	\$0
<u> </u>	Custom Knee Depth (See Specials Request Box)	\$54


SIZING: (see definitions and diagram below)		
REAR SEAT H		
<u> </u>	15.0" Rear Seat Height	\$0
<u> </u>	15.5" Rear Seat Height	\$0
<u> </u>	16.0" Rear Seat Height	\$0
<u> </u>	16.5" Rear Seat Height	\$0
<u> </u>	17.0" Rear Seat Height	\$0
<u> </u>	17.5" Rear Seat Height	\$0
<u> </u>	18.0" Rear Seat Height	\$0
<u> </u>	18.5" Rear Seat Height	\$0
<u> </u>	19.0" Rear Seat Height	\$0
O 15289	19.5" Rear Seat Height	\$0
<u> </u>	20.0" Rear Seat Height	\$0
O 15379	Custom Rear Seat Height	\$54
133/9	(See Specials Request Box)	334
OVERALL LE	NGTH:	
<u> </u>	64" Overall Length	\$0
<u> </u>	66" Overall Length	\$0
<u> </u>	68" Overall Length	\$0
<u> </u>	70" Overall Length	\$0
<u> </u>	72" Overall Length	\$0
O 15255	74" Overall Length (Cannot get compact shipping)	\$0
<u> </u>	76" Overall Length (Cannot get compact shipping)	\$0
<u> </u>	Custom Overall Length (See Specials Request Box)	\$54

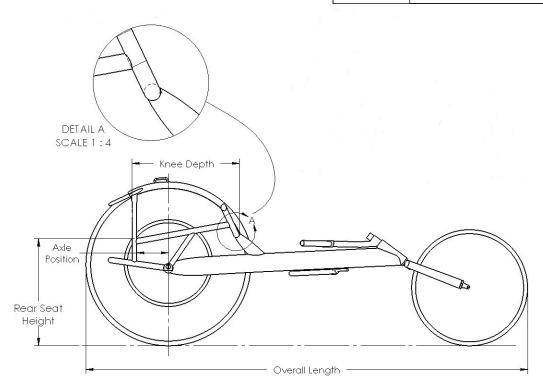



## Top End Sports® Eliminator™ U Cage OSR Racing Wheelchair

		_	
KNEE HEIGHT	KNEE HEIGHT: (see diagram below)		
<u> </u>	16.0" Knee Height	\$0	
O 15310	16.5" Knee Height	\$0	
O 15306	17.0" Knee Height	\$0	
O 15311	17.5" Knee Height	\$0	
<b>15307</b>	18.0" Knee Height	\$0	
O 15312	18.5" Knee Height	\$0	
O 15308	19.0" Knee Height	\$0	
O 15313	19.5" Knee Height	\$0	
O 15309	20.0" Knee Height	\$0	
C 15386	Custom Knee Height (See Specials Request Box)	\$54	



STEERING: (see diagrams below)		
STEERING HANDLE TYPE:		
<u>65120</u>	Horizontal Steering Handle	\$0
O 65121	Vertical Steering Handle	\$0
TRACK CONTROL:		
O 65115	Triangle Track Control	\$0
O 65116	Oval Track Control	\$0
TRACK CONTROL MOUNT:		
65111	Bottom Mount Track Control	\$0





CAMBER ANGLE: (see definitions and diagram to the left)		
○ 45005 11 Degree Camber \$0		\$0
<b>45006</b>	12 Degree Camber	\$0
<b>45007</b>	13 Degree Camber	\$0

WHEEL SETS: (see definitions and diagram to the left)				
FRONT WHEI	FRONT WHEEL TYPE:			
<u> </u>	20" Metal Spoked \$0			
<u> </u>	20" Corima Carbon Fiber	\$605		
REAR WHEEL	TYPE:			
<u> </u>	High Performance, 700C (Clincher)	\$0		
<u> </u>	High Performance, 26" (Clincher)	\$120		
O 50147	Corima Carbon Fiber Disc, 700C (Tubular)	\$2,178		
C 50148	Corima Carbon Fiber 4 Spoke, 700C	\$2,178		
30148	(Tubular)	<b>32,17</b> 0		
FRONT TIRE	ГҮРЕ:			
50464	20" Vittoria	\$0		
<b>50463</b>	20" Panaracer	\$60		
REAR TIRE TY	REAR TIRE TYPE:			
<u> </u>	26" Panaracer (Clincher - 23mm)	\$0		
50460	700C, Black (Clincher - 19mm)	\$0		
O 50241	700C Continental Sprinter (Tubular - 22mm)	\$84		
O 50461	700C Panaracer Rapide (Tubular - 20mm)	\$90		
<u> </u>	700C Continental Podium (Tubular - 22mm)	\$139		

<b>PUSHRIMS:</b>	(Size Selection Required - see diagram)	
RUBBER COA	ATED PUSHRIM SIZE: (Diameter)	
<u> </u>	Omit Pushrims	-\$120 (credit)
O 50330	12.0" Diameter Pushrims	\$0
O 50331	12.5" Diameter Pushrims	\$0
<u> </u>	13.0" Diameter Pushrims	\$0
<u> </u>	13.5" Diameter Pushrims	\$0
<u> </u>	14.0" Diameter Pushrims	\$0
<u> </u>	14.5" Diameter Pushrims	\$0
<u> </u>	15.0" Diameter Pushrims	\$0
<u> </u>	15.5" Diameter Pushrims	\$0
<u> </u>	16.0" Diameter Pushrims	\$0
<u> </u>	16.5" Diameter Pushrims	\$0
<u> </u>	Custom Pushrim Size (See Specials Request Box)	\$54

## TOP END

## Top End Sports® Eliminator™ U Cage OSR Racing Wheelchair

				<u> </u>
FRA	ME COL	OR:		
0	55018	Black	Wet Black	\$0
	55019	Black	Black Prism	\$0
	55017	Black	Stealth Black	\$0
0	55010	Blue	Midnight Blue	\$0
0	55011	Blue	Royal Blue	\$0
0	55012	Blue	Electric Blueberry	\$0
0	55023	Grey	Stealth Grey	\$0
	55053	Green	Agriculture Green	\$0
0	55008	Green	Grasshopper Green	\$0
$\bigcirc$	55054	Green	Neon Green	\$0
0	55006	Orange	Sunkissed Orange	\$0
$\circ$	55005	Orange	Simple Orange	\$0
	55051	Orange	Neon Orange	\$0
	55015	Pink	<b>Bubblegum Pink</b>	\$0
$\circ$	55057	Pink	Neon Pink	\$0
	55055	Purple	Lilac Purple	\$0
	55001	Red	Simple Red	\$0
$\circ$	55002	Red	Tangerine Red	\$0
$\circ$	55003	Red	Raspberry Red	\$0
	55050	Red	Neon Red	\$0
	55020	Silver	Silver Metallic	\$0
$\circ$	55016	White	White Snow	\$0
$\circ$	55007	Yellow	Safety Yellow	\$0
	55052	Yellow	Neon Yellow	\$0
	55070	Raw	<b>Buffed Aluminum</b>	\$0
	55090	Bronze	Las Vegas Bronze	\$0
	55091	Green	Mint Green	\$0
	55092	Pink	Light Pink	\$0
	55093	Grey	Fighter Jet Grey	\$0
	55094	Blue	Tiffany Blue	\$0
$\circ$	55095	Blue	Carolina Blue	\$0

O 55105	Bomber Orange	Frame Color: Bomber Orange	\$0
O 55066	Buffed Aluminum	Frame Color: Buffed Aluminum	\$421
O 55102	Flat Black	Frame Color: Flat Black	\$0
O 55056	Purple Death	Frame Color: Purple Death	\$0
O 55103	Wrinkle Black	Frame Color: Wrinkle Black	\$0
O 15230		Lower Frame Width: 17.5"	\$0
O 15231		Lower Frame Width: 18"	\$0
O 15206		Upper Frame Width: 15.5"	\$0
O 15207		Upper Frame Width: 16"	\$0
O 15208		Upper Frame Width: 16.5"	\$0
O 15209		Upper Frame Width: 17"	\$0





### Top End Sports® Eliminator™ U Cage OSR Racing Wheelchair

	nacing wi
<b>DEFINITIONS:</b>	
Assembled vs Unassembled:	If TE10046 (Unassembled) is selected the chair will require about 60 minutes of assembly upon delivery (instructions provided). If TE10048 (Assembled) is selected the chair will be fully assembled upon delivery. Shipping rate is \$325 for all shipments in the continental US. Freight quotes for shipments outside the continental US are available upon request.
Open V Cage:	Recommended for beginner level athletes with T-10 SCI and above as that level of injury requires more of a bucket type seat. Designed for people who prefer the seated position and/or may also want to kneel. This cage does require good transfer skills.
U Cage:	Recommended for experienced customers who exclusively use the kneeling position. Customers tend to have good balance and are T-10 injury level or below. U cage includes an aluminum knee plate for extra rigidity.
I Cage:	I Cage is the easiest transfer style to use but cannot be converted to a kneeling position. This style is typically used by higher level injury athletes who sit in the traditional feet forward position with an adjustable fixed style footrest.
Aluminum Solid Seat:	Provides a solid surface. Not recommended if customers intend to adjust the seat upholstery.
Carbon Fiber Solid Seat:	Provides a solid Carbon fiber surface. Not recommended if customers intend to adjust the seat upholstery.
Cut Out Camber Tube:	The distance from the front of the cut Camber Tube to the back of the support tube. Recommended when a customer who desires a kneeling position requires additional space for their lower legs. This additional space is accomplished by removing the center portion of the camber tube after welding. Creates more room for legs with low seat heights.
Camber Angle:	Angle of the wheels. Measured from vertical to the angle of the rear tire on one side.
Upper Frame Width:	Measured directly above the center of the Camber Tube, between the insides of the Fenders. Maximum width is 17".
Lower Frame Width:	Measured at the top of the Seat Rail and from the outside of the Uprights. Maximum width is 18".
Rear Seat Height:	Measured from the top of the Seat Rail to the ground.
Overall Length:	Measured from the further most outsides of the front & rear tires.
Axle Position:	Measured from the center of the Camber Tube to the front of the rear Upright. (This needs to be parallel to the ground.)
Knee Height:	Measured from the top of the U-Cage Horizontal Cross Member to the ground.
Knee Depth:	Measured from the back of the Rear Upright to the front of the U-Cage Cross member. (This needs to be parallel to the ground.)
Knee Width:	Measured between the inside of the U-Cage vertical tubing.
Wheel Size:	Eliminator OSR Racing wheelchairs use 700c and 26" size wheels with threaded axles. A standard threaded axle 700c metal spoke wheel with inflated black primo tire measures 26-1/2" +/- 1/8" from outside to outside of the tire. A standard threaded axle 26" metal spoke wheel with inflated Panaracer tire measures 24-1/2" +/- 1/8" from outside to outside of the tire.
Pushrim Size:	Measurement from outside to outside of the metal tubing of the pushrim.

PRODUCT SPECIFICATIONS:	
Weight Capacity:	250 pounds, 113 Kilograms
Approximate Chair Weight:	21 pounds, 9.5 Kilograms
Approximate Box Weight:	37 pounds, 17 Kilograms
Box Dimensions:	77" X 27" X 23"

NOTES:	NOTES:		
Tubular Tires:	A tubular tire (or sew-up) is a bicycle tire that is stitched closed around the inner tube to form a torus. The combination is then glued onto the wheel.		
Clincher Tires:	A clincher tire uses a separate airtight inner tube enclosed by the rim which supports the tire carcass and maintains the bead lock. An advantage of this system is that the inner tube can be easily accessed in the case of a leak to be patched or replaced.		
Front Tire:	Vittoria tire has a thicker tread pattern and is great for training and racing.		
Rear Tire Options:	- 700c Continental Sprinter tires are great for racing and training - 700c Continental Podium are thinner lighter, better for racing		
Fenders:	Fenders are made to accommodate a tire that is up to 25mm.		
Omit Wheels:	When omit wheels is selected, product will not come with wheels, tires, tubes, pushrims or axles.		

#### **Warranty Info:**

Top End Sports warrants the frames and fork when purchased new and unused to be free from defects in materials and workmanship for a period of two (2) years from the date of purchase from Top End Sports LLC or a dealer, with a copy of the seller's invoice required for coverage under this warranty.

Top End warrants the upholstered materials (seat and back) and remaining components of this product when purchased new and unused to be free from defects in materials and workmanship for a period of thirteen (13) months from date of purchase from Top End Sports LLC or a dealer, with a copy of the seller's invoice required for coverage under this warranty

Note: All special requests are subject to approval, additional charges, and additional lead time.

Special Request 1)	
Special Request 2)	
Special Request 3)	
Special Request 4)	
Special Request 5)	