

2026 order form

Use dimension chart to select appropriate size.

Scan for sizing and pricing:
<https://www.rifton.com/hts>




		Z110 small		Z120 medium		Z130 large		
* Seat and back (includes seat belt)		Z111	\$490 ☐	Z121	\$580 ☐	Z131	\$770 ☐	
* Base	CHOOSE	Mobile (tilt-in-space with footboard)	Z112	\$830 ☐	Z122	\$895 ☐	Z132	\$1,130 ☐
		Mobile (non-tilt with footboard)	Z113	\$560 ☐	Z123	\$610 ☐	Z133	\$875 ☐
		Stationary (non-tilt with footboard)	Z184	\$560 ☐	Z185	\$610 ☐	Z186	\$875 ☐
		Tub base (non-tilt)	Z138	\$255 ☐	Z138	\$255 ☐	N/A	
		Mounting bar (round-front toilet)	Z115	\$105 ☐	Z115	\$105 ☐	Z135	\$125 ☐
		Mounting bar (elongated toilet)	Z125	\$105 ☐	Z125	\$105 ☐	Z135	\$125 ☐
* Armrests (pair)	CHOOSE	Low	Z101	\$72 ☐	N/A		N/A	
		Medium	Z102	\$78 ☐	Z102	\$78 ☐	Z102	\$78 ☐
		High	N/A		Z103	\$93 ☐	Z103	\$93 ☐
Casters for mobile base	CHOOSE	Small casters (3")	Z195	\$215 ☐	Z195	\$215 ☐	Z195	\$215 ☐
		Large casters (4")	Z181	\$310 ☐	Z181	\$310 ☐	Z181	\$310 ☐
Seat and back pads (recommended)	CHOOSE	Rear-open seat pad	Z153	\$215 ☐	Z163	\$275 ☐	Z173	\$350 ☐
		Rear-closed seat pad	Z154	\$215 ☐	Z164	\$275 ☐	Z174	\$350 ☐
		No-hole seat pad	Z187	\$215 ☐	Z188	\$275 ☐	Z189	\$350 ☐
		New! Soft seat pad	Z924	\$255 ☐	Z925	\$305 ☐	Z926	\$400 ☐
Headrest		Z104	\$250 ☐	Z104	\$250 ☐	Z104	\$250 ☐	
Push handles (pair)		Z199	\$135 ☐	Z199	\$135 ☐	Z199	\$135 ☐	
Butterfly harness		Z116	\$135 ☐	Z126	\$150 ☐	Z136	\$175 ☐	
Anterior support/tray		Z145	\$240 ☐	Z155	\$290 ☐	Z165	\$385 ☐	
Laterals (pair)	CHOOSE	Small	Z105	\$240 ☐	Z105	\$240 ☐	Z105	\$240 ☐
		Large	N/A		Z106	\$250 ☐	Z106	\$250 ☐
		Small with strap	Z107	\$290 ☐	Z107	\$290 ☐	Z107	\$290 ☐
		Large with strap	N/A		Z108	\$295 ☐	Z108	\$295 ☐
Hip guides (pair)	CHOOSE	Small	Z109	\$140 ☐	Z109	\$140 ☐	Z109	\$140 ☐
		Large	N/A		Z149	\$165 ☐	Z149	\$165 ☐
		Large with thick pads	N/A		Z198	\$165 ☐	Z198	\$165 ☐
Pan		Z117	\$62 ☐	Z127	\$72 ☐	Z137	\$88 ☐	
Bowl adapter		Z196	\$62 ☐	Z196	\$62 ☐	Z197	\$78 ☐	
Deflector	CHOOSE	Standard (requires seat pad)	Z118	\$57 ☐	Z118	\$57 ☐	Z128	\$72 ☐
		Splash guard	Z119	\$62 ☐	Z119	\$62 ☐	Z129	\$78 ☐
		New! Dynamic deflector	N/A		Z923	\$280 ☐	Z923	\$280 ☐
Abductor	CHOOSE	Small	Z124	\$125 ☐	Z124	\$125 ☐	N/A	
		Large	N/A		Z144	\$145 ☐	Z144	\$145 ☐
Ankle straps (pair, require footboard)		Z156	\$93 ☐	Z156	\$93 ☐	Z157	\$104 ☐	
Calf rest (requires footboard)		Z158	\$78 ☐	Z158	\$78 ☐	Z159	\$88 ☐	
Footboard (for mounting bar attachment)		Z146	\$215 ☐	Z147	\$270 ☐	Z148	\$340 ☐	
Portability base with carry bag		Z139	\$610 ☐	Z139	\$610 ☐	N/A		

* Required

HTS dimensions



User dimensions (inches)	Z110 small	Z120 medium	Z130 large
Height	30–46	42–56	50–74
 Key user dimension: height The user's overall height is a general guide to help you select the appropriate size of HTS. Choose the model that allows for growth. Important: Make sure that seat width, depth and height are adequate for each individual user, and that the user's weight does not exceed the maximum working load.			
Item Dimensions (inches)	Z110 small	Z120 medium	Z130 large
Tilt-in-space mobile base footprint	21 x 27	21 x 27	23½ x 33
Tilt-in-space base length at full recline (incl. headrest)	43	49¼	57¼
Non-tilt base footprint	20 x 25	20 x 25	23½ x 29
Seat (front) to footboard height*	8½–13½	10½–15½	11¼–17½
Seat (front) to floor; mobile tilt frame (add 1" for Z181 large casters)	15½–21½	15½–21½	17½–23
Seat (front) to floor; mobile non-tilt frame (add 1" for Z181 large casters)	16–20	17–20½	18–22
Seat (front) to floor; stationary non-tilt frame	13–17	14–17½	15–19
Seat depth (one-inch increments)	8–11	11½–14½	14½–17½
Seat width (depending on hip guides)	8 / 10 / 12	8 / 10 / 12 / 14	11 / 13 / 15 / 17
Hole size in seat pad	open 4 x 9, closed 3 x 8	open 4½ x 12, closed 3½ x 10	open 6 x 14, closed 4½ x 12
Armrest height	5¼	6½	8
Backrest height above seat	16½	19½	24½
Backrest width	11½	13½	16
Distance between laterals	4¾–12	6¾–14½	10½–18
Tilt in space FORWARD (degrees)	**5°	**5°	**5°
Tilt in space BACK (degrees)	**25°	**25°	**25°
Backrest angle adjustment (degrees)	6° fwd, 6° or 18° back	6° fwd, 6° or 18° back	6° fwd, 6° or 18° back
Footboard angle adjustment (degrees)	10°, 20° or 30° fwd, 10° back	10°, 20° or 30° fwd, 10° back	10°, 20° or 30° fwd, 10° back
Max. clear height under seat (tilt frame)	20½	20½	20¾
Max. clear height under seat (stationary non-tilt frame)	15	15	16½
Max. clear height under seat (mobile non-tilt frame)	18	18	19½
Portability base clearance (fits over ADA compliant toilets)	18½	18½	N/A
Bottom of frame to floor; tilt-in-space mobile base	2	2	2
Tub base footprint	23 x 16½ at feet / 19 at top	23 x 16½ at feet / 19 at top	N/A
Tub base height (floor to seat pad)	11 at front, 9½ at back	11 at front, 9½ at back	N/A
Max. working load (lb)	75	150	***250

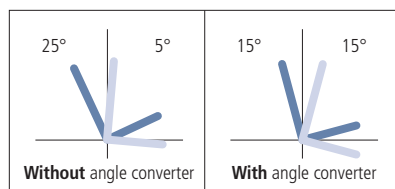

*When the mobile base is in the lower positions and the footboard is fully extended, it may prevent the front casters from swiveling. In this case, either change the footboard angle or raise the seat height to give the casters room to swivel.

To achieve 15° of forward tilt for ease of transfer, order the **tilt angle converter, Z169. (The range of adjustment will be 15° back and 15° forward. See reference charts at left.)

***Max. working load of the large footboard is 150 lb.